


Przyłączka prosta gwintowana
gwint NPT
NPT (ANSI/ASME B 1.20.1 - 1983)

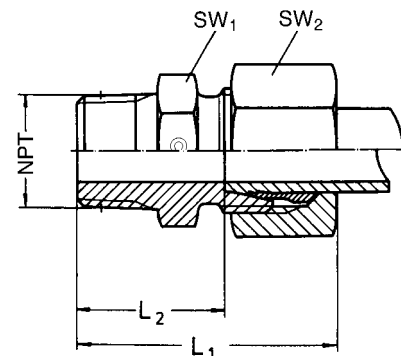

Seria DIN 2353	PN bar	Rura śr. zewn.	Gwint zewn. NPT	SW ₂	SW ₁	L ₁	L ₂	Kod	kg/100szt
S	630	6	1/8 NPT	17	14	36,0	21,0	GE 6-S 1/8 NPT	4,5
		6	1/4 NPT	17	17	43,0	28,0	GE 6-S 1/4 NPT	5,5
		6	3/8 NPT	17	19	43,0	28,0	GE 6-S 3/8 NPT	7,0
		6	1/2 NPT	17	22	50,0	35,0	GE 6-S 1/2 NPT	9,3
		8	1/4 NPT	19	17	43,0	28,0	GE 8-S 1/4 NPT	6,0
		8	3/8 NPT	19	19	43,0	28,0	GE 8-S 3/8 NPT	7,4
		8	1/2 NPT	19	22	50,0	35,0	GE 8-S 1/2 NPT	10,8
		10	1/4 NPT	22	19	43,5	27,5	GE 10-S 1/4 NPT	7,1
		10	3/8 NPT	22	19	43,5	27,5	GE 10-S 3/8 NPT	8,6
		10	1/2 NPT	22	22	50,5	34,5	GE 10-S 1/2 NPT	10,4
		10	3/4 NPT	22	27	50,5	34,5	GE 10-S 3/4 NPT	*)
		12	1/4 NPT	24	22	45,5	29,5	GE 12-S 1/4 NPT	9,6
		12	3/8 NPT	24	22	45,5	29,5	GE 12-S 3/8 NPT	10,0
		12	1/2 NPT	24	22	50,5	34,5	GE 12-S 1/2 NPT	12,1
	12	3/4 NPT	24	27	50,5	34,5	GE 12-S 3/4 NPT	17,0	
	14	3/8 NPT	27	24	49,0	31,0	GE 14-S 3/8 NPT	12,5	
	14	1/2 NPT	27	24	54,0	36,0	GE 14-S 1/2 NPT	16,0	
	14	3/4 NPT	27	27	54,0	36,0	GE 14-S 3/4 NPT	*)	
	14	1 NPT	27	36	61,0	43,0	GE 14-S 1 NPT	*)	
	400	16	3/8 NPT	30	27	49,0	30,5	GE 16-S 3/8 NPT	*)
		16	1/2 NPT	30	27	54,0	35,5	GE 16-S 1/2 NPT	17,0
		16	3/4 NPT	30	32	54,0	35,5	GE 16-S 3/4 NPT	*)
		16	1 NPT	30	36	61,0	42,5	GE 16-S 1 NPT	*)
		20	1/2 NPT	36	32	59,0	37,5	GE 20-S 1/2 NPT	24,6
		20	3/4 NPT	36	32	59,0	37,5	GE 20-S 3/4 NPT	26,8
		20	1 NPT	36	36	64,0	42,5	GE 20-S 1 NPT	*)
		25	1/2 NPT	46	41	64,0	40,0	GE 25-S 1/2 NPT	*)
		25	3/4 NPT	46	41	64,0	40,0	GE 25-S 3/4 NPT	47,4
		25	1 NPT	46	41	69,0	45,0	GE 25-S 1 NPT	50,3
		25	1 1/4 NPT	46	46	70,0	46,0	GE 25-S 1 1/4 NPT	65,4
		25	1 1/2 NPT	46	50	70,0	46,0	GE 25-S 1 1/2 NPT	*)
		30	3/4 NPT	50	46	67,0	40,5	GE 30-S 3/4 NPT	*)
		30	1 NPT	50	46	72,0	45,5	GE 30-S 1 NPT	59,0
	30	1 1/4 NPT	50	46	73,0	46,5	GE 30-S 1 1/4 NPT	65,0	
	30	1 1/2 NPT	50	50	73,0	46,5	GE 30-S 1 1/2 NPT	*)	
	315	38	1 NPT	60	55	79,0	48,0	GE 38-S 1 NPT	95,5
38		1 1/4 NPT	60	55	80,0	49,0	GE 38-S 1 1/4 NPT	95,5	
38		1 1/2 NPT	60	55	80,0	49,0	GE 38-S 1 1/2 NPT	93,5	

Wymiary są podane w przybliżeniu w zależności od stopnia dokręcenia nakrętek
*) Na zapytanie