


## Przyłączka prosta przegrodowa

DIN 3910

DIN 2353 typ R

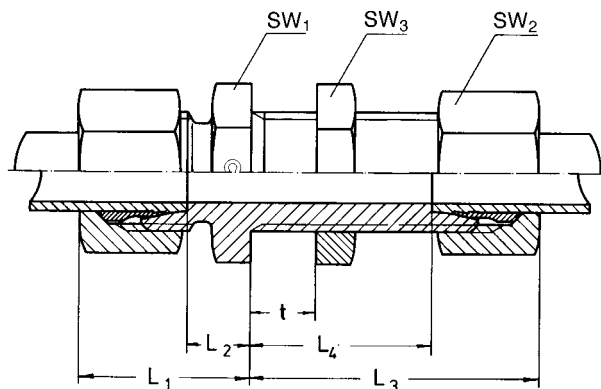

t = max. 16 mm

Seria DIN 2353	PN bar	Rura śr.zew	DIN 13 M	SW <sub>2</sub>	SW <sub>1</sub>	SW <sub>3</sub>	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L <sub>4</sub>	Kod	kg/ 100 szt
RL	315	6	M 12x1,5	14	17	17	22	7,0	42	27,0	SV 6-L	6,2
		8	M 14x1,5	17	19	19	23	8,0	42	27,0	SV 8-L	8,3
		10	M 16x1,5	19	22	22	25	10,0	43	28,0	SV 10-L	10,8
		12	M 18x1,5	22	24	24	25	10,0	44	29,0	SV 12-L	13,5
		15	M 22x1,5	27	27	30	27	12,0	46	31,0	SV 15-L	23,0
		18	M 26x1,5	32	32	36	30	13,5	49	32,5	SV 18-L	34,5
	160	22	M 30x2	36	36	41	33	16,5	51	34,5	SV 22-L	43,5
		28	M 36x2	41	41	46	35	18,5	52	36,5	SV 28-L	54,5
		35	M 45x2	50	50	55	40	18,5	58	36,5	SV 35-L	87,4
		42	M 52x2	60	60	65	42	19,0	59	36,0	SV 42-L	127,5
RS	630	6	M 14x1,5	17	19	19	27	12,0	44	29,0	SV 6-S	10,1
		9	M 16x1,5	19	22	22	28	13,0	44	29,0	SV 8-S	13,2
		10	M 18x1,5	22	24	24	31	14,5	46	29,5	SV 10-S	17,0
		12	M 20x1,5	24	27	27	31	14,5	47	30,5	SV 12-S	21,5
		14	M 22x1,5	27	30	30	35	17,0	50	32,0	SV 14-S	29,5
	400	16	M 24x1,5	30	32	32	35	16,5	50	31,5	SV 16-S	34,5
		20	M 30x2	36	41	41	39	17,5	55	33,5	SV 20-S	57,5
		25	M 36x2	46	46	46	44	20,0	59	35,0	SV 25-S	94,9
		30	M 42x2	50	50	50	48	21,5	64	37,5	SV 30-S	112,0
	315	38	M 52x2	60	65	65	53	22,0	68	37,0	SV 38-S	169,3

Wymiary są podane w przybliżeniu w zależności od stopnia dokręcenia nakrętek