


Przyłączka T nastawna z nakrętką,
stożkiem i o-ringiem wg DIN 3865

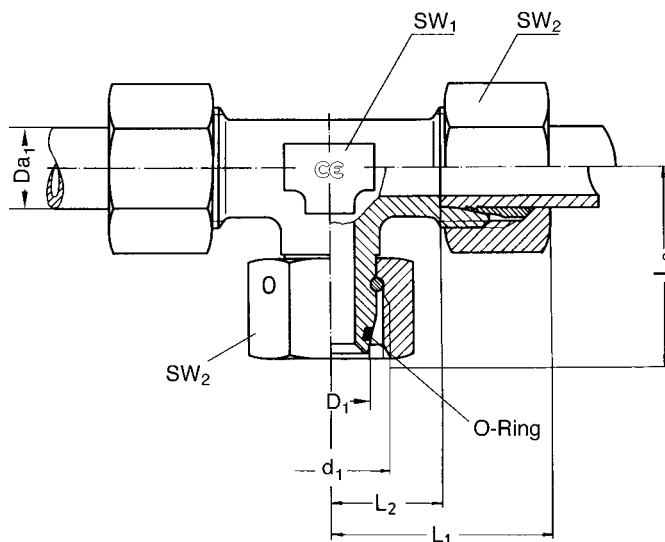

Seria	PN bar	Rura śr. zewn.		L ₁	L ₂	L ₃	SW ₂	SW ₁	D ₁	O-ring	Kod	kg/100szt
		Da ₁	d ₁									
L	315	6	M 12x1,5	27	12,0	26,0	14	12	6	4,0x1,5	ET 6-L	5,8
		8	M 14x1,5	29	14,0	27,5	17	12	8	6,0x1,5	ET 8-L	7,9
		10	M 16x1,5	30	15,0	29,0	19	14	10	7,5x1,5	ET 10-L	10,1
		12	M 18x1,5	32	17,0	29,5	22	17	12	9,0x1,5	ET 12-L	13,5
		15	M 22x1,5	36	21,0	32,5	27	19	15	12,0x2,0	ET 15-L	23,3
	18	M 26x1,5	40	23,5	35,5	32	24	18	15,0x2,0	ET 18-L	33,2	
	160	22	M 30x2	44	27,5	38,5	36	27	22	20,0x2,0	ET 22-L	44,6
		28	M 36x2	47	30,5	41,5	41	36	28	26,0x2,0	ET 28-L	70,2
		35	M 45x2	56	34,5	51,0	50	41	35	32,0x2,5	ET 35-L	96,1
		42	M 52x2	63	40,0	56,0	50	50	42	38,0x2,5	ET 42-L	146,1
S		630	6	M 14x1,5	31	16,0	27,0	17	12	6	4,0x1,5	ET 6-S
	8		M 16x1,5	32	17,0	27,5	19	14	8	6,0x1,5	ET 8-S	11,8
	10		M 18x1,5	34	17,5	30,0	22	17	10	7,5x1,5	ET 10-S	16,3
	12		M 20x1,5	38	21,5	31,0	24	17	12	9,0x1,5	ET 12-S	20,6
	14		M 22x1,5	40	22,0	35,0	27	19	14	10,0x2,0	ET 14-S	(28,1)
	400	16	M 24x1,5	44	24,5	36,5	30	24	16	12,0x2,0	ET 16-S	37,3
		20	M 30x2	48	26,5	44,5	36	27	20	16,3x2,4	ET 20-S	56,8
		25	M 36x2	54	30,0	50,0	46	36	25	22,3x2,4	ET 25-S	107,9
		30	M 42x2	62	35,5	55,0	50	41	30	27,3x2,4	ET 30-S	136,3
	315	38	M 52x2	72	41,0	63,0	60	50	38	33,3x2,4	ET 38-S	203,6