


2/2 WAY PISTON ACTUATED VALVE G 1/2" ÷ 2" NORMALLY OPEN – BRONZE



normally open
flow under seat

TECHNICAL SPECIFICATIONS

Media: water, oil, air, aggressive media and steam ^①
Media temperature: -10°C ÷ +180°C
Ambient temperature: -10°C ÷ +60°C
Pilot media: air, inert gases
Body material: bronze (CB491K EN 1982)
Bonnet material: brass (CW617N EN 12165)
Actuator body material: Polyamide PA6 (reinforced fiberglass 30%)
Seal material: PTFE type TFM 1600
Position indicator as standard

BENEFITS

Waterhammer-free design
Actuator housing rotation 360°

OPTIONS

Manual override (e.g. Code RCG205STWM0) see page 28
Stroke regulator (e.g. Code RCG210STJR0) see page 28
Travel switch (e.g. Code RCG208LTZI0) see page 28
Design for vacuum applications up to 10 ⁻² mbar (e.g. Code CG205STW0V)
NPT Connection (e.g. Code RCN205STW00)

TYPE: REGULAR NO




SELECTION TABLE

VALVE	Connection	DN	Flow rate Kvs	Working pressure ^① min max	Flow direction
Code	[ISO 228 G]	[mm]	[l/min]	[barg] [barg]	[2 → 1]
RCG205STW00	1/2"	15	87	0 16	under seat
RCG206STX00	3/4"	20	164	0 16	under seat
RCG207STY00	1"	25	260	0 16	under seat
RCG208STZ00	1 1/4"	32	410	0 16	under seat
RCG209STK00	1 1/2"	40	700	0 16	under seat
RCG210STJ00	2"	50	950	0 12	under seat
RCG207LTY00	1"	25	260	0 16	under seat
RCG208LTZ00	1 1/4"	32	410	0 16	under seat
RCG209LTK00	1 1/2"	40	700	0 16	under seat
RCG210LTJ00	2"	50	950	0 16	under seat

Pilot pressure ^② min max		Actuator Ø
[barg]	[barg]	[mm]
2.5	10	63
4.3	10	
5.5	10	
6.5	10	
9	10	
9.4	10	
2	8	
4	8	90
5	8	
7	8	

^① Steam: max working pressure 10 bar (9 barg); ^② Minimum pilot pressure at the max working pressure; for lower working pressures please refer to the comparative charts

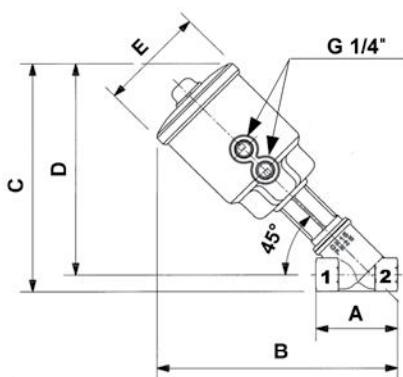

DIMENSIONS & WEIGHTS

Connection	Actuator Ø	A	B	C	D	E	Weight
[ISO 228 G]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]	
1/2"	63	65	192	184	171	85	1.2
3/4"	63	75	198	192	176	85	1.3
1"	63	90	212	205	185	85	1.5
1 1/4"	63	110	225	217	193	85	1.9
1 1/2"	63	120	230	225	198	85	2.1
2"	63	150	248	241	207	85	2.9
1"	90	90	223	216	196	112	2.0
1 1/4"	90	110	234	227	202	112	2.4
1 1/2"	90	120	239	235	207	112	2.6
2"	90	150	257	250	216	112	3.3