



Size 50 mm

With manual operation

Operating features


Operating pressure	from 2 to 8 bar
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Subject to change
without notice





WEIGHT
D1 handle included

Diagram illustrating the weight versions of the 'kg' symbol:

- min. stroke version:** The 'kg' symbol is shown with a weight of 2.85.
- max. stroke version:** The 'kg' symbol is shown with a weight of 3.1.



M5x14 screws _____
Tightening torque: 5 N m

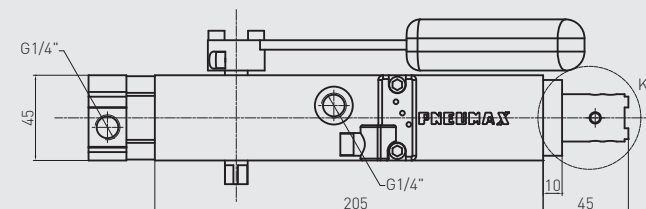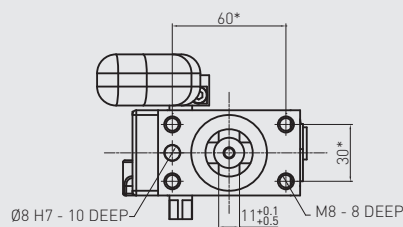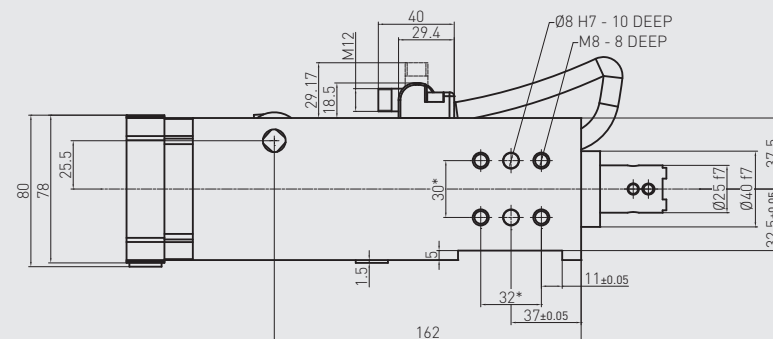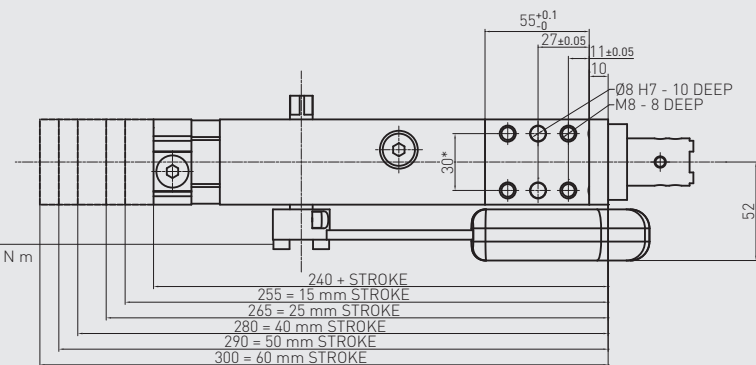

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 18/06/2015

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 18/06/2015

WEIGHT

D1 handle included

kg
2.85

min. stroke
version

kg
3.1

max. stroke
version

RD150E_2

Retractable locating
pin package

Size 50 mm

$\varnothing 10$ mm cross-cut
key rod termination

With manual operation


Technical features

Operating features

Operating pressure from 2 to 8 bar

Lubrication all the devices are lubricated
for life at the factory. Inline air
lubrication isn't required

Subject to change
without notice

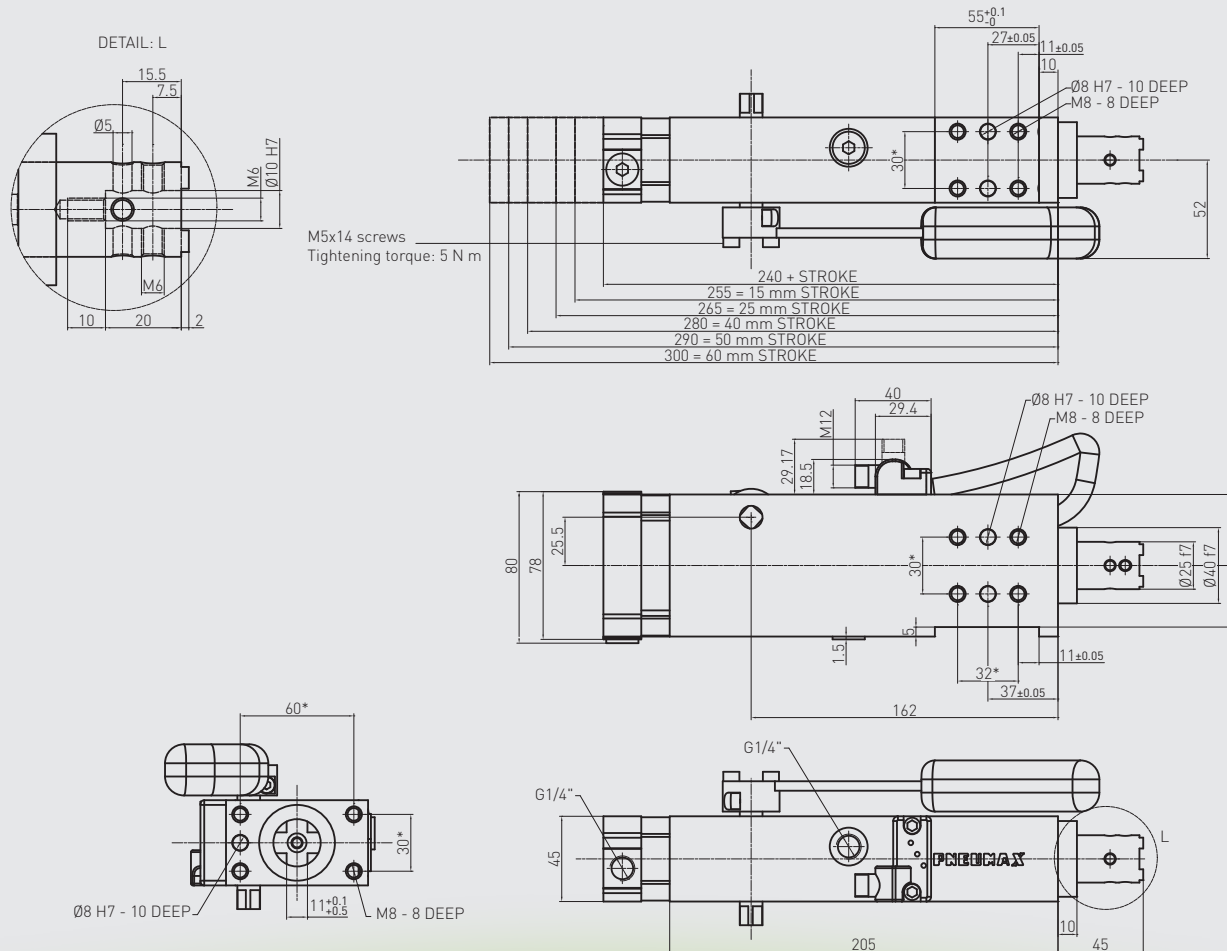



RD150E_3

Retractable locating
pin package

Size 50 mm

Rod termination
for offset pins






With manual operation

WEIGHT
D1 handle included

kg	kg
2.85	3.1
min. stroke version	max. stroke version

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 18/06/2015

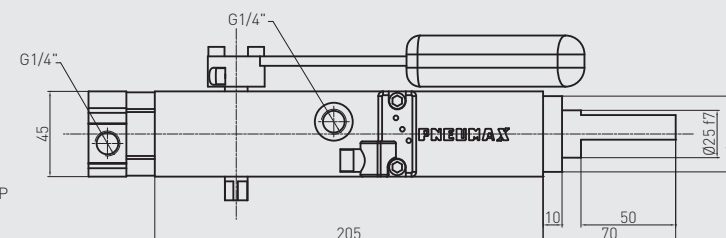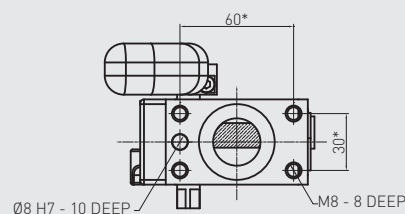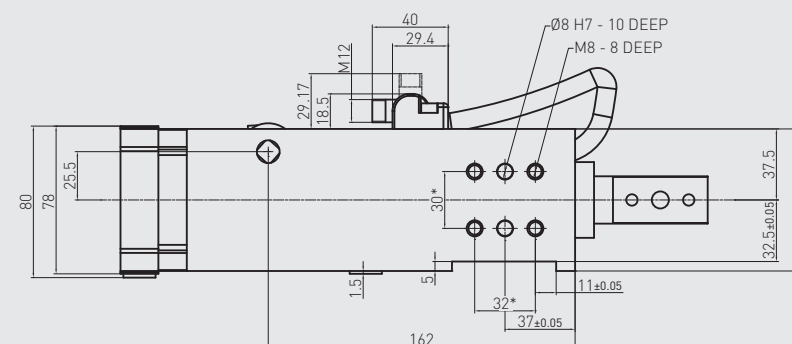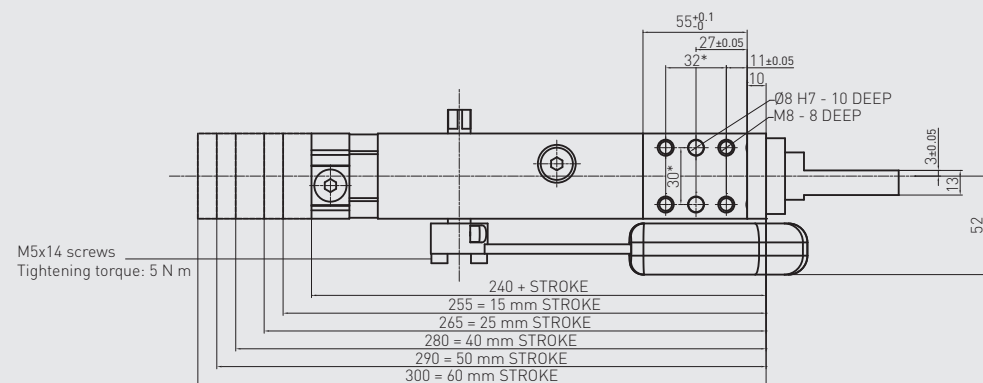

Technical features

Operating features





Operating pressure from 2 to 8 bar

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Subject to change
without notice

* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1

REV. 00 - 18/06/2015

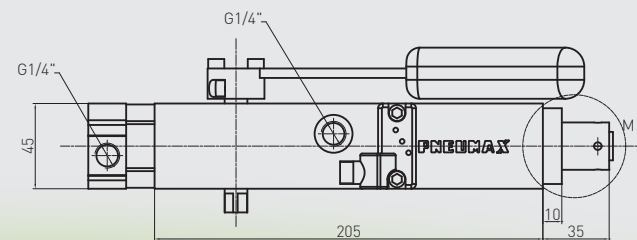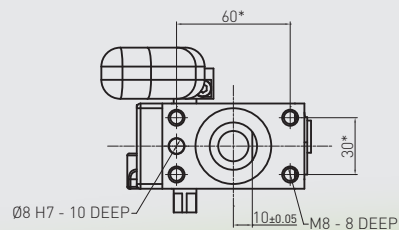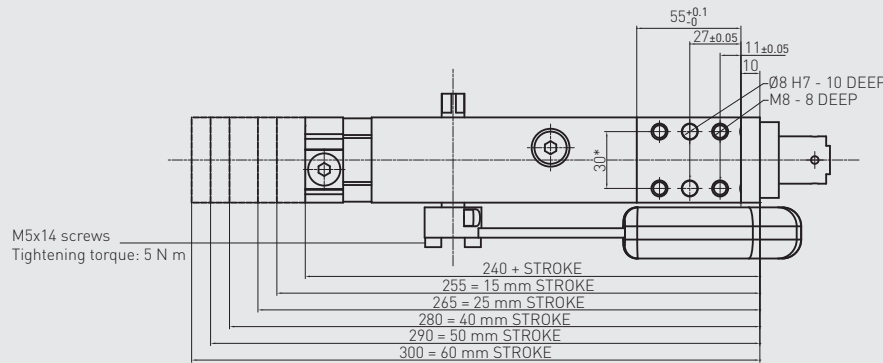

WEIGHT
 D1 handle included

kg	kg
2.85	3.1
min. stroke version	max. stroke version

RD150E_4

Retractable locating
pin package

Size 50 mm

Rod termination with key

With manual operation

Technical features

Operating features	
Operating pressure	from 2 to 8 bar
Lubrication	all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Subject to change
without notice

