

V16 Zawory iglicowe (do pracy w trudnych warunkach)

Ciśnienie robocze do 413 bar (6000 psig)



Opis

Zawory serii V16 przeznaczone są do pracy w szczególnie trudnych warunkach. Dzięki zastosowaniu uszczelnienia Grafoil (jako opcja) zawory te mogą pracować w instalacjach pary wodnej gdzie temperatura sięga granicy 648°C. Nieobracaająca się dolna część dwuczęściowej końcówki trzpienia, zapewnia większą trwałość metalowego gniazda przy zamknięciu zaworu.

Cechy zaworu

- trzpień zaworu w położeniu całkowicie otwartym opiera się o ściętą krawędź pokrywy, zapobiegając znacznym wyciekom w przypadku uszkodzenia uszczelnienia
- w standardzie uszczelnienie trzpienia umieszczone poniżej gwintów zapobiega zanieczyszczeniu gwintu przez czynnik i wypłukiwaniu smaru
- zewnętrzna śruba dławikowa umożliwia regulację uszczelnienia
- trzpień z gwintem walcowanym, poddanym twardeму chromowaniu – wydłuża okres eksploatacji zaworu
- nakrętka kontrolująca - w standardzie, umożliwia montaż zaworu na panelu lub siłowniku
- nakrętka łącząca - zapobiega przypadkowemu rozkręceniu zaworu
- w standardzie rączka prosta ze stali AISI316, opcjonalnie rączka prosta aluminiowa
- zawór dostępny z portami do spawania rur typu TUBE oraz PIPE

Informacje techniczne

Ciśnienie oraz temperatura robocza

Materiał zaworu	Uszczelnienie	Temperatura robocza °C (°F)	Ciśnienie robocze przy (-53 do +37°C) bar (psig)
AISI316 Alloy 20 Alloy C276	PTFE	-53 do +232 (-65 do 449)	413 (6000)
	PEEK	-53 do +315 (-65 do +600)	
	Grafoil ¹	-53 do +648 (-65 do +1200)	

¹Grafoil jest uszczelnieniem przeznaczonym do pracy w wysokich temperaturach. Dla powietrza maksymalna temperatura pracy Grafoil wynosi 523°C (973°F), natomiast w środowisku pary wodnej Grafoil zachowuje się poprawnie przy temperaturach sięgających wartości 648°C (1200°F). Uszczelnienie Grafoil nie nadaje się dla zaworów współpracujących z siłownikami pneumatycznymi.

Zależność ciśnienia od temp. dla zaworów V16 z uszczelnieniem Grafoil

Klasa ciśnieniowa ASME		2500		
Grupa materiałowa ASME		2.2	3.1	3.8
Wersja		AISI316	Alloy 20	C276
Temperatura (°C) °F		Ciśnienie robocze, bar (psig)		
-53 do +38	-65 do +100	413 (6000)	413 (6000)	413 (6000)
93	200	355 (5160)	413 (6000)	413 (6000)
148	300	321 (4660)	408 (5920)	413 (6000)
204	400	294 (4280)	391 (5680)	401 (5820)
260	500	274 (3980)	376 (5460)	381 (5540)
315	600	259 (3760)	347 (5040)	347 (5040)
371	700	249 (3620)	326 (4730)	326 (4730)
426	800	242 (3520)	291 (4230)	291 (4230)
482	900	238 (3460)		258 (3745)
537	1000	208 (3030)		208 (3030)
593	1100	175 (2545)		185 (2685)
648	1200	106 (1545)		118 (1715)

Uwaga: Ciśnienie robocze zaworu może być w pewnych przypadkach ograniczone przez dopuszczalne ciśnienie przyłączy i rur. W katalogu złączy rurowych Dk-Lok w tabelach 2 do 13, znajdują się dane na temat ciśnień roboczych dla różnych rozmiarów rur, materiałów i grubości ścianek.


Eksploatacja

Regulacja uszczelnienia i moment obrotowy

Jeżeli podczas eksploatacji zaworu występują silne fluktuacje temperatury, uszczelnienie może wymagać regulacji. Zawór nie używany przez dłuższy okres czasu może stawić częściowy opór przy pierwszej próbie otwarcia.

Informacje techniczne

Konstrukcja zaworu (materiały)

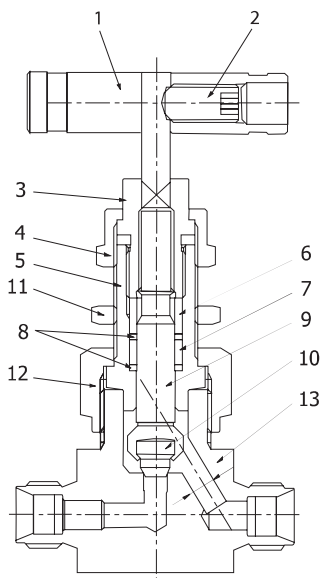

Element

1. Rączka prosta
2. Śruba
3. Śruba dławikowa
4. Nakrętka kołpakowa
5. Pokrywa
6. Dławik
7. Uszczelnienia (2 szt.)
8. Wsporniki uszczelnienia (2 szt.)
9. Trzpień
10. Standardowa końcówka stożkowa,
opcjonalna końcówka kulista lub
regulacyjna
11. Nakrętka kontruująca
12. Nakrętka łącząca
13. Korpus

Wersja AISI316

Wersja AISI316	Wersja Alloy 20	Wersja Alloy C276
AISI316, opcjonalnie rączka z anodowanego aluminium		
Gatunek B8 TYP 304	Gatunek B8 TYP 304	Gatunek B8 TYP 304
AISI316	AISI316	AISI316
AISI316	AISI316	AISI316
AISI316	Alloy 20	C276
AISI316	Alloy 20	C276
PTFE, opcjonalnie PEEK lub Grafoil		
AISI316	Alloy 20	C276
AISI316 ¹	Alloy 20	C276
TYP630	Alloy 20	C276
AISI316	AISI316	AISI316
AISI316	AISI316	AISI316
AISI316	Alloy 20	C276


¹ – trzpień dodatkowo chromowany

Elementy natłuszczone i naolejone zaznaczone są na niebiesko.


Smarowanie: Smar niklowy i przeciwzatarciowy (nośnik węglowodorowy); końcówka kulista: smar na bazie węglowodorów.

Parametry techniczne - zawory VB16


Wersja prosta

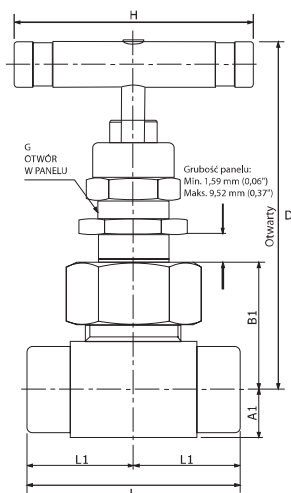

Przyłącze spawane



Wersja kątowa

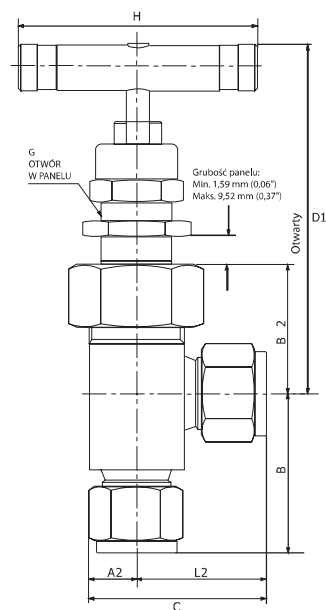

Parametry techniczne - zawory VB16


Podstawowy kod zamówieniowy	Przyłącza wej./wyj.	DN mm (cal)	Cv	Wymiary mm (cal)														
				L	L1	L2	B	C	B1	B2	A1	A2	H	G	D	D1	F	
V16A-	F-2N-	1/8" wew. NPT	4.0 (0.156)	0.35	50.8 (2.00)	25.4 (1.00)	22.6 (0.89)	25.4 (1.00)	32.3 (1.27)	27.7 (1.09)	32.5 (1.28)	9.7 (0.38)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	82.0 (3.23)	-
	F-4N-	1/4" wew. NPT			52.3 (2.06)	26.2 (1.03)	22.6 (0.89)	25.4 (1.00)	32.3 (1.27)	27.7 (1.09)	32.5 (1.28)	9.9 (0.39)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	82.0 (3.23)	-
	M-4N-	1/4" zew. NPT			50.8 (2.00)	25.4 (1.00)	25.4 (1.00)	25.4 (1.00)	35.1 (1.38)	27.7 (1.09)	27.7 (1.09)	9.7 (0.38)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	77.2 (3.04)	-
	MF-4N-	1/4" zew. NPT / 1/4" wew. NPT			51.6 (2.03)	26.2 (1.03)	22.6 (0.89)	25.4 (1.00)	32.3 (1.27)	27.7 (1.09)	32.5 (1.28)	9.9 (0.39)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	82.0 (3.23)	-
	D-6M-	6 mm Port Dk-Lok			61.0 (2.40)	30.5 (1.20)	29.5 (1.16)	376 (1.48)	39.1 (1.54)	27.7 (1.09)	27.7 (1.09)	9.7 (0.38)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	77.2 (3.04)	-
	D-4T-	1/4" Port Dk-Lok			61.0 (2.40)	30.5 (1.20)	29.5 (1.16)	376 (1.48)	39.1 (1.54)	27.7 (1.09)	27.7 (1.09)	9.7 (0.38)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	77.2 (3.04)	-
	SW-4T-	1/4" TUBE SW			46.2 (1.82)	23.1 (0.91)	22.4 (0.88)	30.2 (1.19)	31.8 (1.25)	27.7 (1.09)	27.7 (1.09)	9.7 (0.38)	9.7 (0.38)	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	77.2 (3.04)	7.1 (0.28)
	D-8M-	8 mm Port Dk-Lok			61.0 (2.40)	30.5 (1.20)	-	-	-	27.7 (1.09)	-	9.7 (0.38)	-	44.4 (1.75)	15.1 (19/32)	77.2 (3.04)	-	-
V16B-	F-4N-	1/4" wew. NPT	6.4 (0.25)	0.86	57.2 (2.25)	28.4 (1.12)	25.4 (1.00)	28.4 (1.12)	38.1 (1.50)	34.0 (1.34)	37.3 (1.47)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	97.0 (3.82)	-
	F-6N-	3/8" wew. NPT			57.2 (2.25)	28.4 (1.12)	25.4 (1.00)	28.4 (1.12)	38.1 (1.50)	34.0 (1.34)	37.3 (1.47)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	97.0 (3.82)	-
	D-10M-	10mm Port Dk-Lok			72.4 (2.85)	36.1 (1.42)	33.0 (1.30)	39.4 (1.55)	45.7 (1.80)	34.0 (1.34)	34.3 (1.35)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	93.7 (3.69)	94.2 (3.71)	-
	D-6T-	3/8" port Dk-Lok			71.9 (2.83)	35.8 (1.41)	32.8 (1.29)	42.2 (1.66)	45.5 (1.79)	34.0 (1.34)	31.0 (1.22)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	90.7 (3.57)	-
	D-12M-	12mm port Dk-Lok			77.2 (3.04)	38.6 (1.52)	35.6 (1.40)	41.9 (1.65)	48.3 (1.90)	34.0 (1.34)	34.0 (1.34)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	94.0 (3.70)	-
	D-8T-	1/2" port Dk-Lok			77.2 (3.04)	38.6 (1.52)	35.6 (1.40)	41.9 (1.65)	48.3 (1.90)	34.0 (1.34)	34.0 (1.34)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	94.0 (3.70)	-
	SW-4P-	1/4" PIPE SW			57.2 (2.25)	28.4 (1.12)	25.4 (1.00)	28.4 (1.12)	38.1 (1.50)	34.0 (1.34)	37.3 (1.47)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	97.0 (3.82)	9.7 (0.38)
	SW-6T-	3/8" TUBE SW			57.2 (2.25)	28.4 (1.12)	25.4 (1.00)	31.8 (1.25)	38.1 (1.50)	34.0 (1.34)	34.0 (1.34)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	94.0 (3.70)	7.9 (0.31)
	SW-8T-	1/2" TUBE SW			57.2 (2.25)	28.4 (1.12)	25.4 (1.00)	25.4 (1.00)	38.1 (1.50)	34.0 (1.34)	35.6 (1.40)	12.7 (0.50)	12.7 (0.50)	63.5 (2.50)	19.8 (25/32)	94.0 (3.70)	95.5 (3.76)	9.7 (0.38)
V16C-	F-8N-	1/2" wew. NPT	11.1 (0.437)	2.20	79.2 (3.12)	39.6 (1.56)	33.3 (1.31)	39.6 (1.56)	50.8 (2.00)	46.2 (1.82)	50.8 (2.00)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	126 (4.97)	-
	F-12N-	3/4" wew. NPT			82.6 (3.25)	41.1 (1.62)	-	-	-	48.5 (1.91)	-	19.8 (0.78)	-	88.9 (3.50)	26.2 (1-1/32)	124 (4.88)	-	-
	F-16N-	1" wew. NPT			91.9 (3.62)	46.0 (1.81)	-	-	-	54.1 (2.13)	-	25.4 (1.00)	-	88.9 (3.50)	26.2 (1-1/32)	129 (5.10)	-	-
	MF-8N-	1/2" zew. NPT / 1/2" wew. NPT			79.2 (3.12)	39.6 (1.56)	33.3 (1.31)	39.6 (1.56)	50.8 (2.00)	46.2 (1.82)	50.8 (2.00)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	126 (4.97)	-
	MF-12N-	3/4" zew. NPT / 3/4" wew. NPT			82.6 (3.25)	41.1 (1.62)	-	-	-	48.5 (1.91)	-	19.8 (0.78)	-	88.9 (3.50)	26.2 (1-1/32)	124 (4.88)	-	-
	MF-16N-	1" zew. NPT / 1" wew. NPT			91.9 (3.62)	46.0 (1.81)	-	-	-	54.1 (2.13)	-	25.4 (1.00)	-	88.9 (3.50)	26.2 (1-1/32)	129 (5.10)	-	-
	D-12M-	Port Dk-Lok 12 mm			99.6 (3.92)	49.8 (1.96)	42.7 (1.68)	52.8 (2.08)	60.2 (2.37)	46.2 (1.82)	47.8 (1.88)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	123 (4.85)	-
	D-8T-	1/2" port Dk-Lok			99.6 (3.92)	49.8 (1.96)	42.7 (1.68)	52.8 (2.08)	60.2 (2.37)	46.2 (1.82)	47.8 (1.88)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	123 (4.85)	-
	D-12T-	3/4" port Dk-Lok			99.6 (3.92)	49.8 (1.96)	42.7 (1.68)	52.8 (2.08)	60.2 (2.37)	46.2 (1.82)	47.8 (1.88)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	123 (4.85)	-
	D-16T-	1" port Dk-Lok			104 (4.09)	51.8 (2.04)	-	-	-	47.8 (1.88)	-	17.5 (0.69)	-	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	123 (4.85)	-
	SW-8P-	1/2" PIPE SW			79.2 (3.12)	39.6 (1.56)	33.3 (1.31)	39.6 (1.56)	50.8 (2.00)	47.8 (1.88)	50.8 (2.00)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	123 (4.85)	126 (4.97)	9.7 (0.38)
	SW-8T-	1/2" TUBE SW			79.2 (3.12)	39.6 (1.56)	33.3 (1.31)	42.9 (1.69)	50.8 (2.00)	46.2 (1.82)	47.8 (1.88)	15.7 (0.62)	17.5 (0.69)	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	123 (4.85)	9.7 (0.38)
SW-12T-	3/4" TUBE SW	79.2 (3.12)	39.6 (1.56)	-	-	-	46.2 (1.82)	-	15.7 (0.62)	-	88.9 (3.50)	26.2 (1-1/32)	121 (4.78)	-	11.2 (0.44)			

Wymiary podane w powyższej tabeli mają charakter orientacyjny, a producent zastrzega sobie możliwość wprowadzenia zmian.

Wymiary dotyczące długości zaworu z Portem Dk-Lok podane są dla nakrętek dokręconych ręcznie.

O inne konfiguracje przyłączy zapytaj producenta.

Zawory V16 z siłownikiem pneumatyczny dwustronnego działania

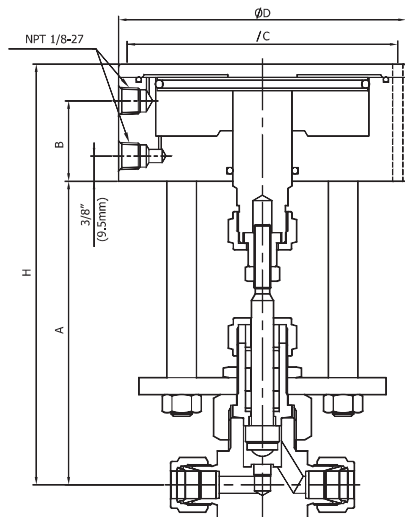

Seria zaworu	Wymiary mm (cal)				
	A	H	D	C	B
V16A	107 (4.22)	150 (5.91)	82.6 (3.25)	82.6 (3.25)	28.4 (1.12)
V16B	114 (4.47)	158 (6.22)	108 (4.25)	96.8 (3.81)	30.2 (1.19)

Podane wymiary mają charakter orientacyjny i mogą podlegać zmianom.

Maksymalne dopuszczalne ciśnienie bar (psig)	Temperatura robocza °C(°F)
10,4(150)	-28 do 204 (-20 do 300)


Zawory serii V16A i V16B z uszczelnieniem PTFE lub PEEK nadają się do współpracy z siłownikami pneumatycznym. Zawory tych serii z uszczelnieniem Grafoil nie mogą współpracować z siłownikami.

Eksploatacja


Krzywe 1 i 2 podają minimalne ciśnienie w siłowniku wymagane do otwarcia lub zamknięcia zaworu, w zależności od ciśnienia roboczego w instalacji. W celu wydłużenia okresu eksploatacji zaworu, siłowniki powinny pracować przy minimalnym ciśnieniu uruchomienia siłownika.

Podane krzywe zostały otrzymane dla wyregulowanych fabrycznie śrub dławikowych. W celu utrzymania szczelności zaworu może być wymagana dodatkowa regulacja śrub dławikowych. Jeżeli śruba dławikowa jest dokręcona zbyt mocno, ciśnienie siłownika nie może przewyżżyć tarcia pomiędzy uszczelnieniem a trzpieniem zaworu. Jeżeli śruba jest dokręcona zbyt słabo przy niższych ciśnieniach w systemie, przy wyższych ciśnieniach mogą wystąpić wycieki. Zatem moment dokręcający śruby dławikowej musi być wystarczający, aby zapobiec wyciekom przez uszczelnienie.

Seria V16A z siłownikiem dwustronnego działania - AD

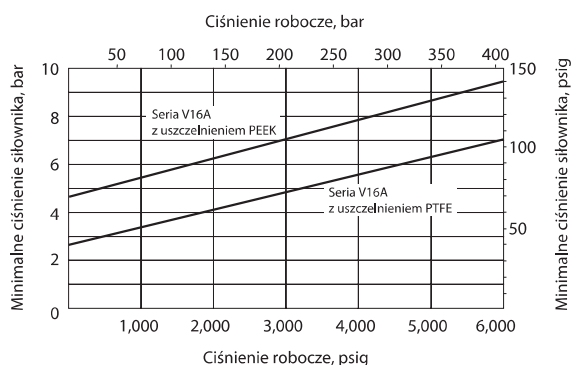

Seria V16B z siłownikiem dwustronnego działania - BD

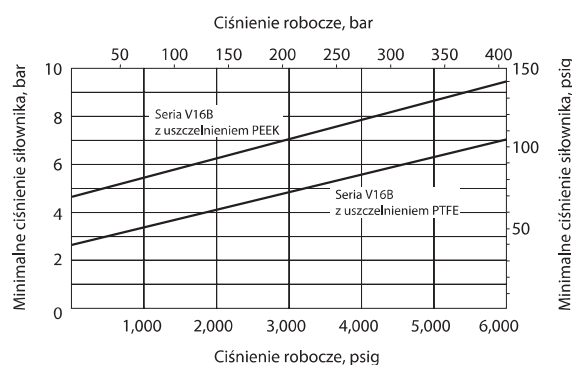


Opcje zamówienia

Pełny kod zaworu, tworzy się dodając do podstawowego kodu zaworu zawartego w tabelach powyżej opcje opisane w tabeli poniżej.
Przykład **V16B-D-4T-A-GF-B-AH-SG-BD-L20**: Zawór iglicowy V16 z portem Dk-Lok ¼" z obu stron, wersja kątowa, uszczelnienie Grafoil, kulista końcówka trzpienia, rączka prosta aluminiowa, do pracy z gazami „kwaśnymi”, siłownik dwustronnego działania, korpus z ALLOY20.

Opcje dodatkowe

- Nic
Końcówka stożkowa



- B
Końcówka kulista



- R
Końcówka regulacyjna



Zawory ze standardową końcówką stożkową lub kulistą przeznaczone są jedynie do pracy dwupołożeniowej (położenie w pełni otwarte lub w pełni zamknięte). Współczynnik C_v dla tych końcówek podano w tabeli Parametry techniczne na [str. X](#).

Zawory do pracy z gazami kwaśnym


Zawory serii V16 dostępne są również w wersji przeznaczonej do pracy z gazami „kwaśnymi” (o dużej zawartości związków siarki), spełniające wymagania normy NACE MR 0175 (opcja – **SG**).

Rączki zaworu

W standardzie zawór V16 wyposażono w rączkę prostą ze stali AISI316. Dostępna jest również rączka prosta z czarnego anodowanego aluminium (opcja – **AH**).


Istnieje możliwość zamówienia samej rączki. Kody rączek podane są w tabeli poniżej.

Seria zaworów	Rączka prosta do samodzielnego montażu	
	AISI316	Aluminium
V16A	V16A-BH	V16A-AH
V16B	V16B-BH	V16B-AH
V16C	V16C-BH	V16C-AH

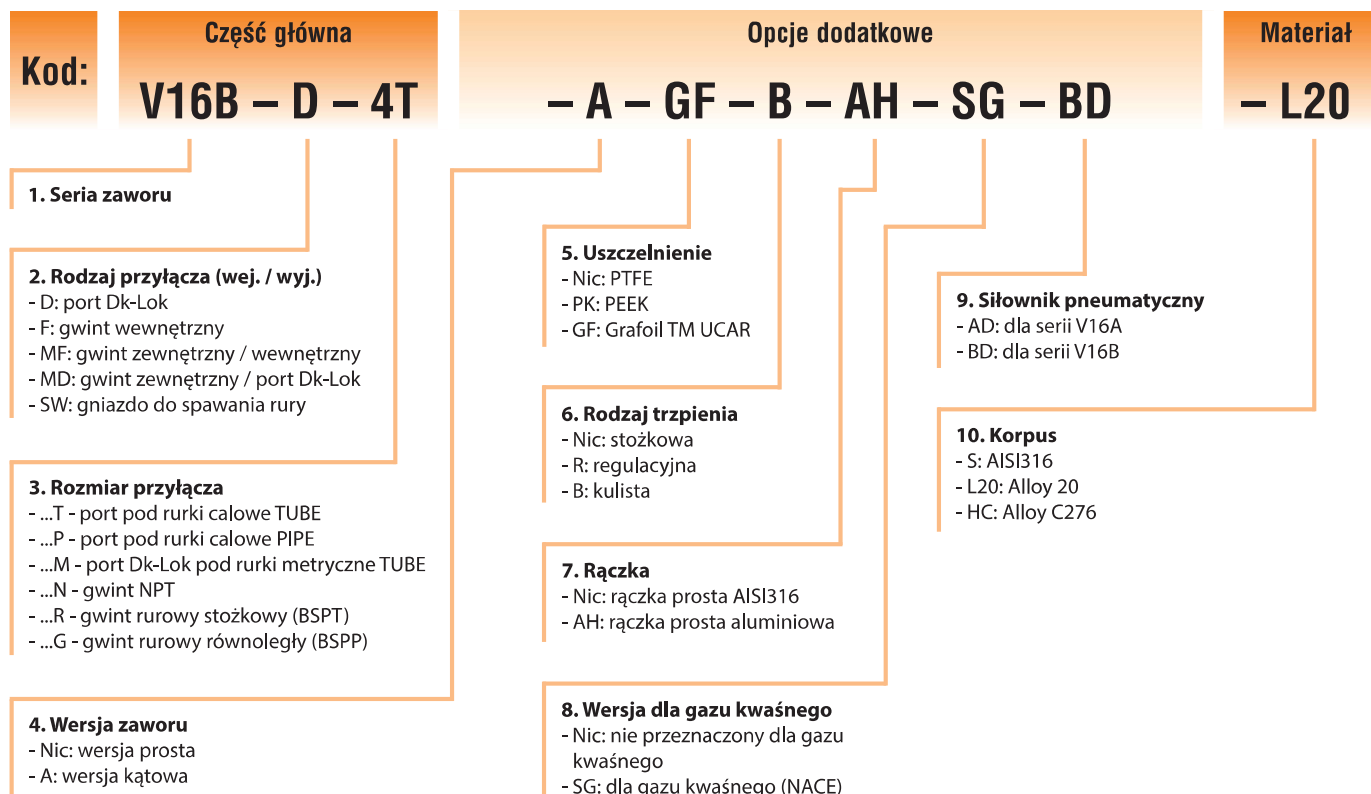


Features

- Pressure up to 10,000 psig (689 bar) @ 100°F (38°C).
- Temperature Rating up to 449°F (232°C) with standard PTFE packing; up to 1,200°F (648°C) with Grafoil packing.
- Standard 316 stainless steel, optional Alloy 400, and Alloy C276 construction.
- Valve stem back seating against the bevelled edge of bonnet in fully open position prevents maximum leakage through bonnet when packing fails.
- Standard non-rotating stem disc and stem packing below the threads design.



- **Handle**- Standard Stainless Steel formed handle, optional aluminum bar handle.
- **External Packing Bolt**- allows packing adjustment without the valve disassembly.
- **Roll threaded and hard chrome plated stem**- is for long valve life.
- **Panel Mounting Nut**- is standard and permits valve to panel or actuator.
- **Union Nut**- prevents accidental disassembly of the valve in service.
- **Stem Packing below the threads**- prevents media contamination and thread lubricant washout.
- **Stem Back Seating**- in fully open position.
- **Non-Rotating Stem Disc at Closure**- is for maximum metal seat life and positive seal.

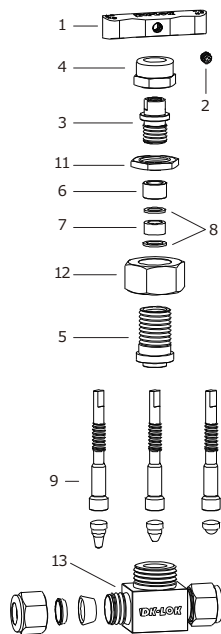

Materials of Construction

Component	Valve Body Materials		
	SS316	Alloy 400	Alloy C276
	Material Grade/ASTM Specification		
1. Bar handle	Stainless Steel for V16, SS316/A276 for VH16, optional anodized aluminum handle		
2. Set screw	SS304		
3. Packing bolt	SS316/A276 or A479		
4. Cap nut	SS316/A276 or A479		
5. Bonnet	SS316/A276 or A479	Alloy 400/B164	C276/B574
6. Gland	SS316/A276 or A479	Alloy 400/B164	C276/B574
7. Packing (2)	PTFE/D1710, optional PEEK & Grafoil		
8. Packing supports (2)	SS316/A276 or A479	Alloy 400/B164	C276/B574
9. Stem	Hard Chrome-plated SS316/A276 or A479	Alloy 400/B164	C276/B574
10. Standard globe disc, optional globe ball & regulating disc.	TYPE630/A564	Alloy 400/B164	C276/B574
11. Panel nut	SS316		
12. Union nut	SS316/A276 or A479		
13. Body	SS316/A276 or A479	Alloy 400/B164	C276/B574


Wetted parts and lubricants are listed in blue.

Lubrication : • Nickel anti-seize lubricant (hydrocarbon carrier).
• Ball disc: hydrocarbon-based.

Technical Data


Ratings below are for valves with standard PTFE packing. Refer to valve ratings with optional packing on Page 4.

Valve Material	Stem Disc Designator	Temperature Rating °F(°C)	Pressure Rating @ -65 to 100°F (-53 to 38°C)
SS316 Alloy 400 Alloy C276	Globe: Nil. Regulating: -R Ball: -B	-65 to 450 (-53 to 232)	10,000 psig (689 bar)

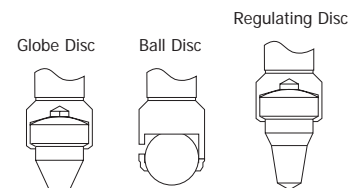

Factory Test and Cleaning

Every valve is tested with the nitrogen gas @ 1,000 psig (68.9 bar) for leakage at the seat to a maximum allowable leak rate of 0.1 SCCM. The packing is tested for no detectable leakage. Optional hydrostatic shell test with additional cost is performed with pure water at 1.5 times the working pressure. Every valve is cleaned and packaged in accordance with DK-Lok cleaning standard DC-01.

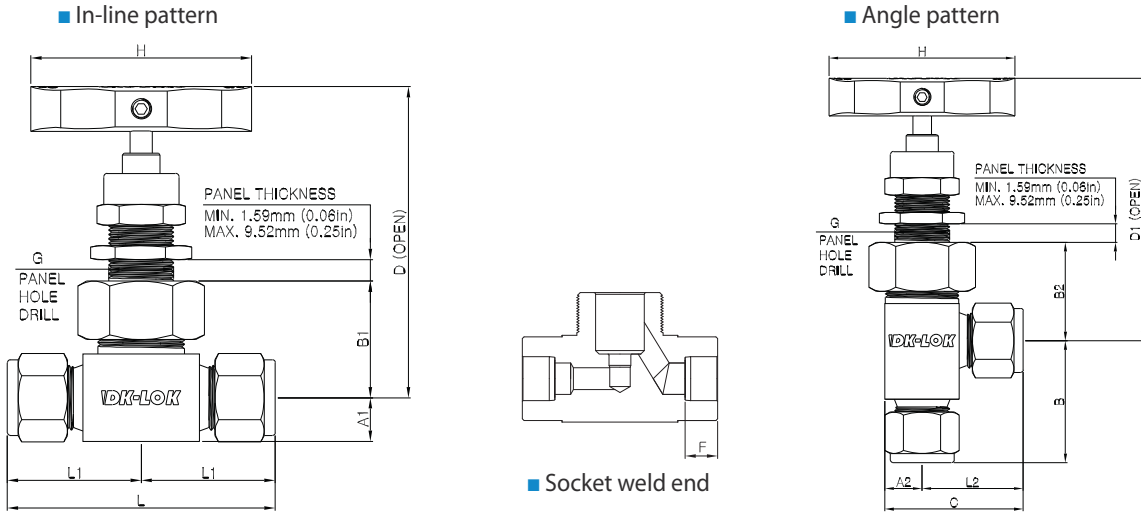


Basic Ordering Number	End connections		Orifice mm (in.)	Cv	Dimensions, mm (inch)													
	Inlet	Outlet			L	L1	L2	B	C	B1	B2	A1	A2	H	G	D	D1	F
V16A-	F2N-	1/8 Female NPT	4.0 (0.156)	0.35	50.8(2.00)	25.4(1.00)	22.6(0.89)	25.4(1.00)	32.3(1.27)	27.7(1.09)	27.7(1.09)	9.7(0.38)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	F4N-	1/4 Female NPT			52.3(2.06)	26.2(1.03)	22.6(0.89)	25.4(1.00)	32.3(1.27)	27.7(1.09)	27.7(1.09)	9.7(0.39)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	M4N-	1/4 Male NPT			50.8(2.00)	25.4(1.00)	25.4(1.00)	25.4(1.00)	35.1(1.38)	27.7(1.09)	27.7(1.09)	9.7(0.38)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	MF4N-	1/4 Male to Female NPT			51.6(2.03)	26.2(1.03)	22.6(0.89)	25.4(1.00)	32.3(1.27)	27.7(1.09)	27.7(1.09)	9.7(0.39)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	D6M-	6mm DK-Lok			61.0(2.40)	30.5(1.20)	29.5(1.16)	37.6(1.48)	39.1(1.54)	27.7(1.09)	27.7(1.09)	9.7(0.38)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	D4T-	1/4 DK-Lok			61.0(2.40)	30.5(1.20)	29.5(1.16)	37.6(1.48)	39.1(1.54)	27.7(1.09)	27.7(1.09)	9.7(0.38)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	-
	SW4T-	1/4 TSW			46.2(1.82)	23.1(0.91)	22.4(0.88)	30.2(1.19)	31.8(1.25)	27.7(1.09)	27.7(1.09)	9.7(0.38)	9.7(0.38)	45.0(1.77)	15.1(19/32)	77.2(3.04)	77.2(3.04)	7.1(0.28)
	D8M-	8mm DK-Lok			61.0(2.40)	30.5(1.20)	-	-	-	27.7(1.09)	-	9.7(0.38)	-	45.0(1.77)	15.1(19/32)	77.2(3.04)	-	-
V16B-	F4N-	1/4 Female NPT	6.4 (0.25)	0.86	57.2(2.25)	28.4(1.12)	25.4(1.00)	28.4(1.12)	38.1(1.50)	34.0(1.34)	37.3(1.47)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	F6N-	3/8 Female NPT			57.2(2.25)	28.4(1.12)	25.4(1.00)	28.4(1.12)	38.1(1.50)	34.0(1.34)	37.3(1.47)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	D10M-	10mm DK-Lok			72.4(2.85)	36.1(1.42)	33.0(1.30)	39.4(1.55)	45.7(1.80)	34.0(1.34)	34.3(1.35)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	D6T-	3/8 DK-Lok			71.9(2.83)	35.8(1.41)	32.8(1.29)	42.2(1.66)	45.5(1.79)	34.0(1.34)	31.0(1.22)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	D12M-	12mm DK-Lok			77.2(3.04)	38.6(1.52)	35.6(1.40)	41.9(1.65)	48.3(1.90)	34.0(1.34)	34.0(1.34)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	D8T-	1/2 DK-Lok			77.2(3.04)	38.6(1.52)	35.6(1.40)	41.9(1.65)	48.3(1.90)	34.0(1.34)	34.0(1.34)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	-
	SW4P-	1/4 PSW			57.2(2.25)	28.4(1.12)	25.4(1.00)	28.4(1.12)	38.1(1.50)	34.0(1.34)	37.3(1.47)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	9.5(0.37)
	SW6T-	3/8 TSW			57.2(2.25)	28.4(1.12)	25.4(1.00)	31.8(1.25)	38.1(1.50)	34.0(1.34)	34.0(1.34)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	7.9(0.31)
SW8T-	1/2 TSW	57.2(2.25)	28.4(1.12)	25.4(1.00)	25.4(1.00)	38.1(1.50)	34.0(1.34)	35.6(1.40)	12.7(0.50)	12.7(0.50)	64.0(2.52)	19.8(25/32)	92(3.62)	92(3.62)	9.5(0.37)			
V16C-	F8N-	1/2 Female NPT	11.1 (0.437)	2.20	79.2(3.12)	39.6(1.56)	33.3(1.31)	39.6(1.56)	50.8(2.00)	46.2(1.82)	50.8(2.00)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	126(4.97)	-
	F12N-	3/4 Female NPT			82.6(3.25)	41.1(1.62)	-	-	-	48.5(1.91)	-	19.8(0.78)	-	90.0(3.54)	26.2(1-1/32)	124(4.88)	-	-
	F16N-	1" Female NPT			91.9(3.62)	46.0(1.81)	-	-	-	54.1(2.13)	-	25.4(1.00)	-	90.0(3.54)	26.2(1-1/32)	129(5.10)	-	-
	MF8N-	1/2 Male to Female NPT			79.2(3.12)	39.6(1.56)	33.3(1.31)	39.6(1.56)	50.8(2.00)	46.2(1.82)	50.8(2.00)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	126(4.97)	-
	MF12N-	3/4 Male to Female NPT			82.6(3.25)	41.1(1.62)	36.5(1.43)	41.3(1.62)	56.4(2.22)	48.5(1.91)	50.8(2.0)	19.8(0.78)	19.8(0.78)	90.0(3.54)	26.2(1-1/32)	124(4.88)	126(4.97)	-
	MF16N-	1" Male to Female NPT			91.9(3.62)	46.0(1.81)	-	-	-	54.1(2.13)	-	25.4(1.00)	-	90.0(3.54)	26.2(1-1/32)	129(5.10)	-	-
	D12M-	DK-Lok 12mm			99.6(3.92)	49.8(1.96)	42.7(1.68)	52.8(2.08)	60.2(2.37)	46.2(1.82)	47.8(1.88)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	123(4.85)	-
	D8T-	1/2 DK-Lok			99.6(3.92)	49.8(1.96)	42.7(1.68)	52.8(2.08)	60.2(2.37)	46.2(1.82)	47.8(1.88)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	123(4.85)	-
	D12T-	3/4 DK-Lok			99.0(3.89)	49.5(1.94)	42.7(1.68)	52.8(2.08)	60.2(2.37)	46.2(1.82)	47.8(1.88)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	123(4.85)	-
	D16T-	1 DK-Lok			104(4.09)	51.8(2.04)	-	-	-	47.8(1.88)	-	17.5(0.69)	-	90.0(3.54)	26.2(1-1/32)	123(4.85)	-	-
	SW8P-	1/2 PSW			79.2(3.12)	39.6(1.56)	33.3(1.31)	39.6(1.56)	50.8(2.00)	47.8(1.88)	50.8(2.00)	15.7(0.69)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	123(4.85)	126(4.97)	9.5(0.37)
	SW8T-	1/2 TSW			79.2(3.12)	39.6(1.56)	33.3(1.31)	42.9(1.69)	50.8(2.00)	46.2(1.82)	47.8(1.88)	15.7(0.62)	17.5(0.69)	90.0(3.54)	26.2(1-1/32)	121(4.78)	123(4.85)	9.5(0.37)
SW12T-	3/4 TSW	79.2(3.12)	39.6(1.56)	-	-	-	46.2(1.82)	-	15.7(0.62)	-	90.0(3.54)	26.2(1-1/32)	121(4.78)	-	11.2(0.44)			

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.


- Non-rotating globe disc providing repetitive leak tight shut-off is standard.
- To order Angle Pattern, insert -A in the basic ordering number. Refer to the ordering information on page 4.

Ordering Information

VH16 Series (High Pressure)

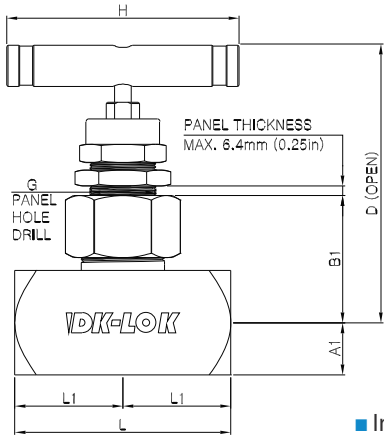

■ In-line pattern



■ Socket weld end

Basic Ordering Number	End connections		Orifice mm (in.)	Cv	Dimensions, mm (inch)							
	Inlet	Outlet			L	L1	B1	A1	H	G	D	F
VH16A-	F2N-	1/8 Female NPT	4.0 (0.156)	0.35	57.2(2.25)	28.7(1.13)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	-
	F4N-	1/4 Female NPT			57.2(2.25)	28.7(1.13)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	-
	M4N-	1/4 Male NPT			57.2(2.25)	28.7(1.13)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	-
	MF4N-	1/4 Male to Female NPT			57.2(2.25)	28.7(1.13)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	-
	D4T-	1/4 DK-Lok			71.6(2.82)	35.8(1.41)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	-
	SW4T-	1/4 TSW			57.2(2.25)	28.7(1.13)	34.0(1.34)	12.7(0.50)	63.5(2.50)	20.6(0.81)	77.2(3.04)	7.1(0.28)
VH16B-	F4N-	1/4 Female NPT	6.4 (0.25)	0.86	79.5(3.13)	39.6(1.56)	46.0(1.81)	16.0(0.63)	88.9(3.50)	26.9(1.06)	108(4.27)	-
	F8N-	1/2 Female NPT			82.6(3.25)	41.4(1.63)	48.2(1.90)	19.8(0.78)	88.9(3.50)	26.9(1.06)	111(4.36)	-
	M8N-	1/2 Male NPT			79.5(3.13)	39.6(1.56)	46.0(1.81)	16.0(0.63)	88.9(3.50)	26.9(1.06)	108(4.27)	-
	MF8N-	1/2 Male to Female NPT			82.6(3.25)	41.4(1.63)	48.2(1.90)	19.8(0.78)	88.9(3.50)	26.9(1.06)	111(4.36)	-

All dimensions shown are for reference only and are subject to change. Dimensions with DK-Lok nuts are in finger-tight position.

- Non-rotating globe disc providing repetitive leak tight shut-off is standard.
- To order Angle Pattern, insert -A in the basic ordering number. Refer to the ordering information on page 4.

Pressure-Temperature Ratings

Ratings are based on valves with optional Grafoil packing.

V16 Series

ASME Class	2500		N/A
	Material Group	2.2	3.4
Material Name	SS316	Alloy 400	Alloy C-276
Temperature, °F (°C)	Working pressure, psig (bar)		
-65 (-53) to 100 (38)	6000 (413)	5000 (344)	6000 (413)
200 (93)	5160 (355)	4400 (303)	6000 (413)
300 (148)	4660 (321)	4120 (283)	6000 (413)
400 (204)	4280 (294)	3980 (274)	5880 (405)
500 (260)	3980 (274)	3960 (272)	5540 (381)
600 (315)	3760 (259)	-	5040 (347)
700 (371)	3600 (248)	-	4730 (325)
800 (426)	3460 (238)	-	4230 (291)
900 (482)	3280 (225)	-	3745 (258)
1000 (537)	3030 (208)	-	3030 (208)
1100 (593)	2685 (184)	-	2685 (184)
1200 (648)	1715 (118)	-	1545 (106)

VH16 Series (High Pressure)

ASME Class	N/A
Material Group	N/A
Material Name	SS316
Temperature, °F (°C)	Working pressure, psig (bar)
-65(-53) to 100 (38)	10000 (689)
200 (93)	9290 (640)
300 (148)	8390 (578)
400 (204)	7705 (530)
500 (260)	7165 (493)
600 (315)	6770 (466)
700 (371)	6480 (446)
800 (426)	6230 (429)
900 (482)	5905 (406)
1000 (537)	5450 (375)
1100 (593)	4835 (333)
1200 (648)	3085 (212)

Grafoil packing information

Grafoil is a high temperature packing material that requires a load on the material to generate a seal. In air, Grafoil maximum temperature is 973°F (523°C), in steam, Grafoil goes up to the maximum temperature of 1,200°F (648°C). Grafoil packing is not for use with pneumatic actuating valves.

Valve ratings with DK-Lok end connections

Valve ratings may be limited to the maximum working pressure of connective pipe and tubing. For valve rating with DK-Lok tube fitting end connections, refer to DK-Lok catalog providing suggested working pressures in various tubing OD, wall thicknesses, and materials.


Packing adjustment and actuation torque

Extreme temperature fluctuations while valve in service may require packing adjustment. Valves that have not been actuated for a period of time may have a higher initial actuation torque.

Valve ratings with optional PEEK packing

SS316 and C276 valve with PEEK packing is limited to maximum 600 °F (315 °C) rating ; Alloy 400 valve with PEEK packing is limited to maximum 500 °F (260 °C) rating.

Flow Data @ 100°F (38°C) for valves with regulating disc

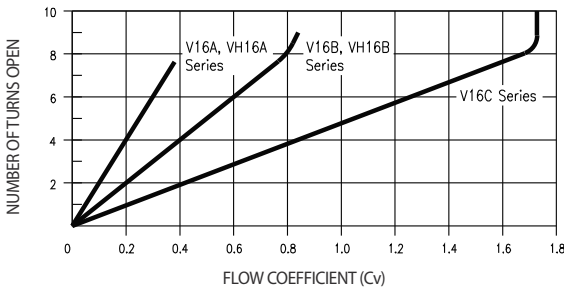

Globe and Ball Disc

Valve with standard globe and ball disc is designed for use in a fully open or fully closed position. Refer to Cv in the ordering information and dimensions table on Page 2.

Cv reduction

Valve flow may be reduced by the restriction of pipe and tubing connected.



Sour Gas Valves

Valves for use in sour gas are available. Valve wetted components are selected to the requirements of NACE MR0175 for sulfide stress cracking resistant materials. To order, insert -SG in the basic ordering number.

Optional Handles

SS316 bar handle is standard. Optional anodized black aluminum bar handle is available. To order valve with factory-assembled optional aluminum handle, insert designator -AH in the ordering number. To order handle for field assembly, select desired handle ordering number from the table.

Valve Series	Field Assembly Bar Handle	
	SS316	Aluminum
V16A	V16A-BH	V16A-AH
V16B	V16B-BH	V16B-AH
V16C	V16C-BH	V16C-AH

Ordering Information

Select the desired valve basic ordering number, options and body material. Regulating stem disc is standard for VH16 series. Optional ball stem disc stem is available. To order, insert designator -R or -B in the ordering number.

V16B-D-6T- V16C-MF-12N- VH16B-F-8N-	A	-PK GF	-B	-AH	-SG	-BD	-S
Valve Pattern Designator	Packing Material Designator	Stem Disc Designator	Handle Designator	Sour Gas Designator	Pneumatic Actuator Designator	Valve Material Designator	
Nil : In-line A : Angle	Nil : PTFE PK : PEEK GF : Grafoil*	Nil : Globe R : Regulating B : Ball	Nil : Stainless Steel formed handle for V16, SS316 bar handle for VH16 AH : Aluminum bar handle for V16	Nil : no Sour Gas SG : Sour Gas	Refer to the actuator ordering information on page 6	S : SS316 M : Alloy 400 HC : Alloy C276	

* Grafoil™ UCAR

We reserve the right to change the specifications stated in this catalog for our continuing program of valve improvement.




Pneumatic Actuators

V16 series Pneumatic actuators are designed to actuate valves remotely.

V16A and V16B series are available to be equipped with pneumatic actuators in normally closed, normally open, and double-acting models.



Dimensions

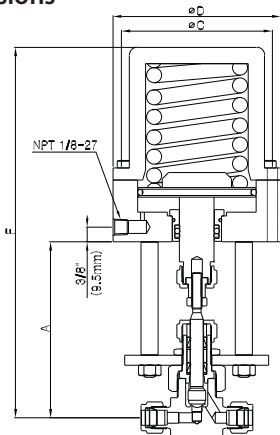

Valve Series	Dimensions in. (mm)					
	A	H	ØD	ØC	B	F
V16A	107 (4.22)	150 (5.91)	95.3 (3.75)	82.6 (3.25)	28.4 (1.12)	215 (8.47)
V16B	114 (4.47)	158 (6.22)	108 (4.25)	96.8 (3.81)	30.2 (1.19)	239 (9.41)

All dimensions are reference only and subject to change.

Actuator Technical Data Pressure-Temperature Ratings

Normally closed	Normally open and double acting
150 psig (10.3 bar) -20 to 300°F (-28 to 148°C)	150 psig (10.3 bar) -20 to 400°F (-28 to 204°C)

Pneumatic Actuator Applicability

V16A and V16B series valves with PTFE or PEEK packing are applicable to pneumatic actuator. Those valves with Grafoil packing are not applicable to pneumatic actuator.

Operation Information

Curve 1 - 6 indicate the minimum actuator pressure to open or close pneumatic actuators against system pressure.
 To prolong valve life, actuators should be operated at minimum air actuator pressures.
 Curves shown are based on packing bolt factory adjustment.
 Packing bolt adjustment may be required to maintain the valve leak-tight.
 If the packing bolt is over-tightened, the actuating pressure can not overcome the friction force between the over-tightened packing and the stem.
 If the packing bolt is under-tightened for low system pressures, it may leak at high system pressures.
 However, packing bolt torque must be sufficiently maintained to prevent packing from leakage.


Normally Closed Actuators

Adjusting the actuator stem drive nut affects the actuator inside the spring force. This will also have implications for other actuator components sequentially.






Normally Open Actuators

The stem orifice opens beyond the first open position depends on system pressure, flow characteristics of the fluid and valve packing nut adjustment.

V16A Series

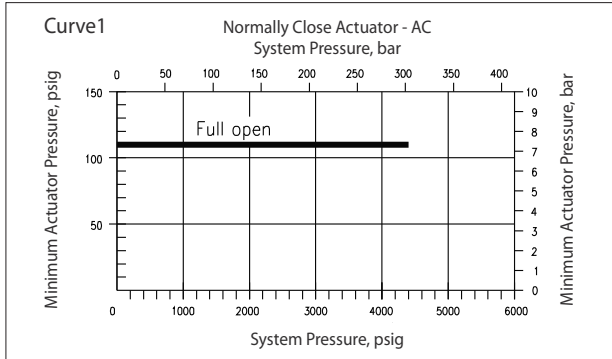

V16B Series

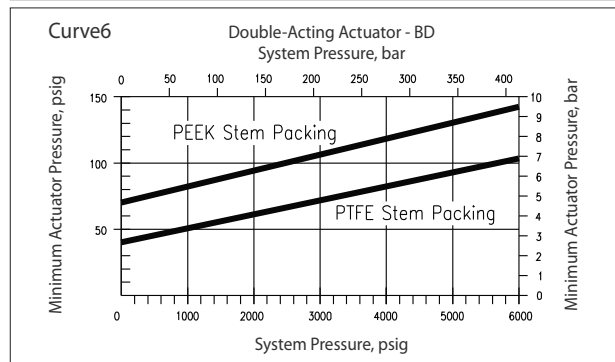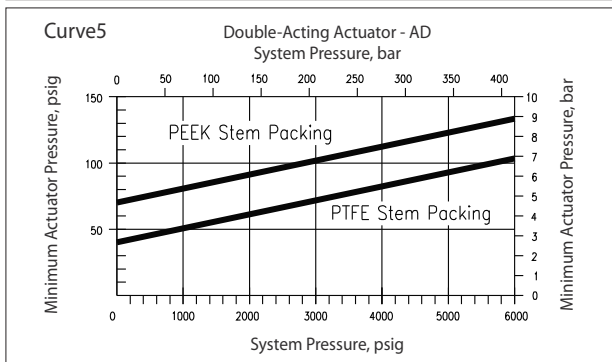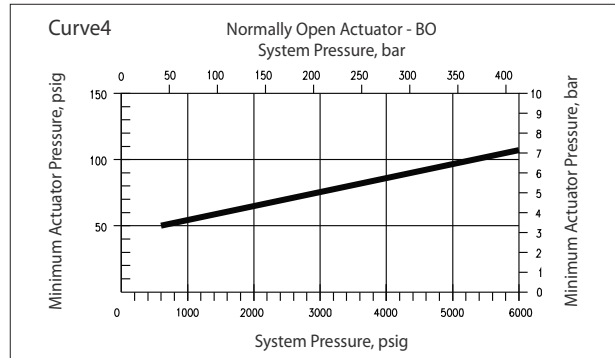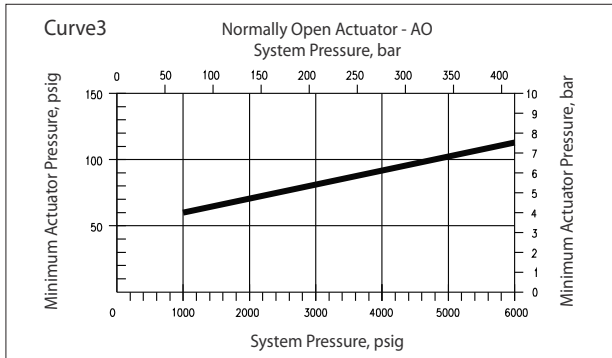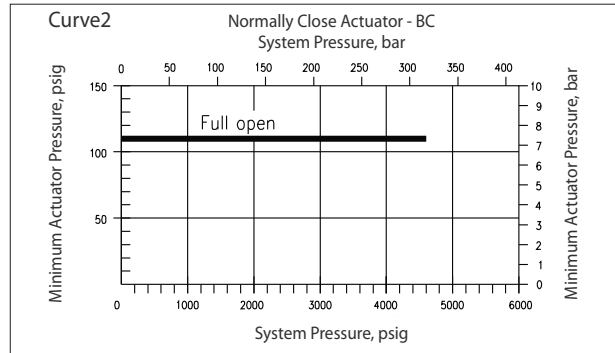

Actuator Ordering Information

To order valves with a pneumatic double acting actuator, insert the desired actuator designator from the chart in the valve ordering number.

Example: V16B-D6T-PK-B-**BD**-S

Valve Series	Pneumatic Actuator Designator		
	Normally Closed	Normally Open	Double Acting
V16A	AC	AO	AD
V16B	BC	BO	BD

Safe Valve Selection

The selection of a valve for any application or system design must be considered to ensure safe performance.

Valve function, valve rating, material compatibility, proper installation, operation and maintenance remain the sole responsibility of the system designer and the user. DK-Lok accepts no liability for any improper selection, installation, operation or maintenance.