


2/2 WAY PILOT OPERATED SOLENOID VALVE WITH ASSISTED LIFT, G 1/4" ÷ G 1/2"

COMMON FEATURES

- Media: water, oil, air
- Media temperature: -10°C ÷ +130°C
- Ambient temperature: -10°C ÷ +50°C
- Body material: brass (CW617N EN 12165)
- Operator material: stainless steel
- Operator seal material: FKM
- Main seal and diaphragm material: FKM
- Protection class: IP 65 (with connector and gasket)


TYPE: D884/885/886



Normally Closed



DIMENSIONS & WEIGHTS		D884	D885	D886
G connection	[ISO 228]	1/4"	3/8"	1/2"
A	[mm]	54	54	54
B	[mm]	89	89	89
C	[mm]	Hex 27	Hex 27	Hex 27
D	[mm]	15	15	15
weight	[kg]	0,45	0,4	0,4

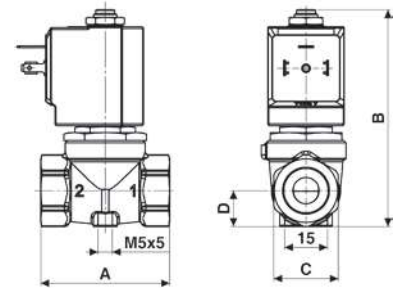

Flow direction overseat 1 → 2

VALVE	nominal Ø	flow rate Kvs	OPD			COILS	
			min.	max. AC	max. DC	code	[Volts/Hz]
code	[mm]	[l/min]	[barg]	[barg]	[barg]	code	[Volts/Hz]
D884DVU	10.5	21	0	16	6	7250	24v DC
D885DVU	10.5	24	0	16	6	7200	24v 50/60Hz
D886DVU	10.5	25	0	16	6	7400	110v 50Hz - 120v 60Hz
						7600	200v 50Hz - 220v 60Hz
						7700	230v 50Hz - 240v 60Hz

D884/885/886 - FKM seal, NC -

Coil power: AC 18vA (holding)
AC 36vA (inrush)
DC 14w

GENERAL PURPOSE

