



BOURDON
The Original by Baumer



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm

Applications

- Power generation safety equipment



Technical Data

Temperature range	-46 ... 0 °C to 40 ... 120 °C		Ground connection	Via internal terminal block
Temperature	Process:	-46 ... +120 °C	Electrical connection	Terminal block with plastic cable gland for Ø 7 to 10.5 mm
	Ambient:	-30 ... + 55 °C	Electrical function	See ordering code details on page 5
	Storage:	-40 ... + 55 °C	Adjustment	2 external adjustment screws on top of the case for set point and dead band
Repeatability	± 1% F.S. / constant temperature cycle			
CE conformity	Low Voltage Directive 2014/35/EU			
Protection rating	IP 66 (EN 60529)			
Process connection	RTA:	Copper alloy		
	RTN:	Stainless steel 1.4404 (316L)		
Bulb	Stainless steel 1.4435/1.4404 (316L)			
Scale	Internal. Accuracy on reading ± 5% F.S.			
Weight	2 kg			
Cover	Zamak blue painted Captive stainless steel screws			
Case	Black Zamak			
Mounting	Direct mounting or with wall mounting bracket			


Options

Customer specific set point adjustment	Code SETP
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838
Electrical connection: stainless steel connector (Souriau)	Code 2298
Mobile plug for stainless steel connector (Souriau)	Code 2249

Principle

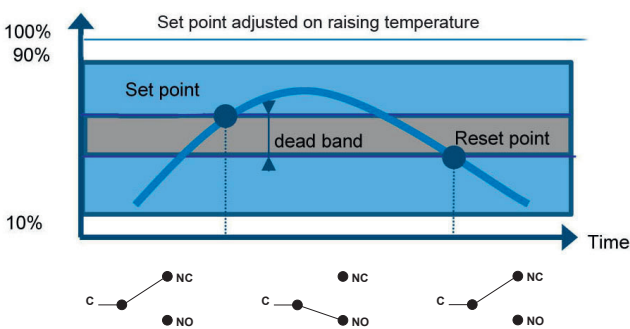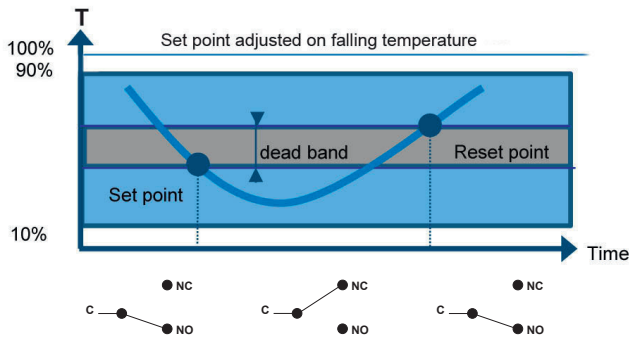

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

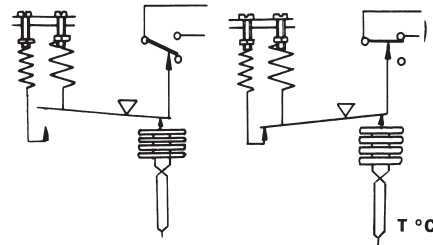

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling temperature


Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:


- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

1 SPDT



2 SPDT

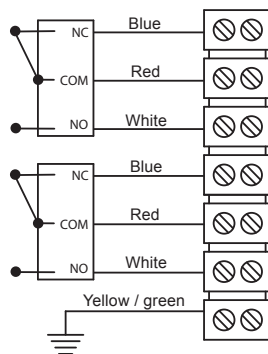

Micro switches characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	H	D (V)	J
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Manual reset	Ultra sensitive Hermetic	Manual reset
6 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
12 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
24 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 4 A	0.1 ... 8 A
30 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 2 A	0.1 ... 8 A
48 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	N/A	N/A	N/A	N/A
110 Vdc	0.1 ... 0.5 A	10 ... 50 mA	5 mA ... 1 A	N/A	N/A	N/A	N/A
220 Vdc	0.1 ... 0.25 A	10 ... 50 mA	5 mA ... 0.5 A	N/A	N/A	N/A	N/A
115 Vac	0.4 ... 10 A	10 ... 50 mA	50 mA ... 3 A	0.4 ... 10 A	0.1 ... 10 A	N/A	0.1 ... 10 A
250 Vac	0.2 ... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	0.1 ... 5 A	N/A	0.1 ... 5 A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	2000 V	1000 V	2000 V

Adjustable ranges





Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾										
			Adjustable dead band				Fixed dead band						
			A (B*)		M (K*)		C (W*)		E (F*)		H	D (V*)	J
			10%	90%	10%	90%	10%	90%	10%	90%	10%	90%	
°C			°C										
-46 ... 0	40	300	4 - 9	2 - 9	8 - 12	4 - 12	1.5	0.8	5	2.5			
-20 ... 20	60	301	3 - 8	1.5 - 8	6 - 12	4 - 12	1	0.5	4	2			
0 ... 45	60	302	4 - 9	2 - 9	7 - 12	4 - 12	1.5	0.7	5	2.5			
40 ... 120	145	303	5 - 16	3 - 16	10 - 20	6 - 20	2	1.2	6	4			
20 ... 80	100	315	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3			

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5


⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

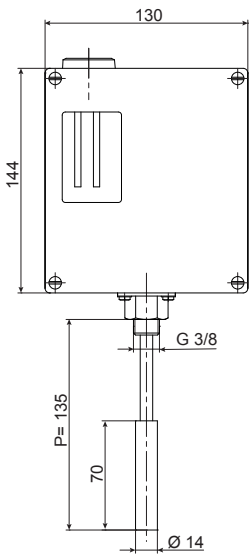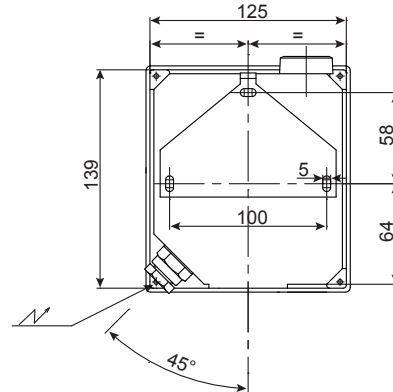

Thermowell
Thermowell for RTxx3
Stainless steel
Ordering code: 10271317




Ordering details RTNA3 - RTAA3

	RT	-	A	A	A	.	3xx	.	E	0	0	E	J	/
Model	RT	-												
Industrial temperature switch	RT	-												
Type of the bulb														
Stainless steel bulb + copper alloy connection			A											
Stainless steel bulb + connection			N											
Approval														
Standard version without ATEX approval				A										
Type of micro switches														
					Deadband									
1 SPDT standard changeover switch					Adjustable	A								
2 SPDT standard changeover switch					Adjustable	B								
1 SPDT hermetically changeover switch					Adjustable	C								
2 SPDT hermetically changeover switch					Adjustable	W								
1 SPDT ultra sensitive changeover switch					Fix	E								
2 SPDT ultra sensitive changeover switch					Fix	F								
1 SPDT hermetically, ultra sensitive changeover switch					Fix	D								
2 SPDT hermetically, ultra sensitive changeover switch					Fix	V								
1 SPDT gold contact changeover switch					Adjustable	M								
2 SPDT gold contact changeover switch					Adjustable	K								
1 SPDT changeover switch, manual reset, opening on raising pressure					Fix	H								
1 SPDT changeover switch, manual reset, opening on falling pressure					Fix	J								
Temperature range (°C)														
-46 ... 0							300							
-20 ... 20							301							
0 ... 45							302							
40 ... 120							303							
20 ... 80							315							
Type of design														
Direct mounting (TRD)									E					
Capillary length														
Without capillary										0				
Stem length P														
P=135 mm											0			
Bulb diameter														
Ø 14 mm													E	
Process connection														
G3/8														J

Options to be added behind the / (see example below)

Ordering example with options

	RT	-	A	A	A	.	300	.	E	0	0	E	J	/	SETP	_	9941
Industrial temperature switch	RT	-															
Stainless steel bulb + Copper alloy connection			A														
Without ATEX approval				A													
1 SPDT standard changeover switch					A												
Temperature range -46 ... 0 °C						.	300	.									
TRD direct mounting									E								
Without capillary										0							
Immersion length P=135 mm											0						
Bulb diameter Ø 14 mm													E				
Process connection G3/8																	J
Option: Customer specific set point adjustment															SETP	_	
Option: Stainless steel tag plate and wire																	9941

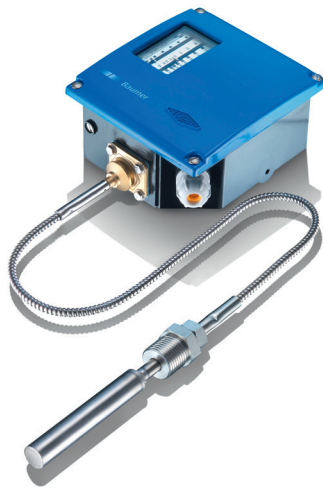

Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Capillary 1 to 20 meters

Applications

- Power generation safety equipment



Technical Data

Temperature range	-46 ... 0 °C to 200 ... 270 °C		Ground connection	Via internal terminal block
Temperature	Process:	-46 ... +270 °C	Electrical connection	Terminal block with plastic cable gland for Ø 7 to 10.5 mm
	Ambient:	-30 ... + 55 °C	Electrical function	See ordering code details on page 5
	Storage:	-40 ... + 55 °C	Adjustment	2 external adjustment screws on top of the case for set point and dead band
Repeatability	± 1% F.S. / constant temperature cycle			
CE conformity	Low Voltage Directive 2014/35/EU			
Protection rating	IP 66 (EN 60529)			
Process connection	Stainless steel 1.4404 (316L)			
Bulb	Stainless steel 1.4435/1.4404 (316L)			
Capillary	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L) For types of protection see ordering details on page 5			
Scale	Internal. Accuracy on reading ± 5% F.S.			
Cover	Zamak blue painted Captive stainless steel screws			
Case	Black Zamak			
Mounting	Wall mounting bracket			


Options

Customer specific set point adjustment	Code SETP
Mounting on 2" pipe	Code 0407
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838
Electrical connection: stainless steel connector (Souriau)	Code 2298
Mobile plug for stainless steel connector (Souriau)	Code 2249

Principle

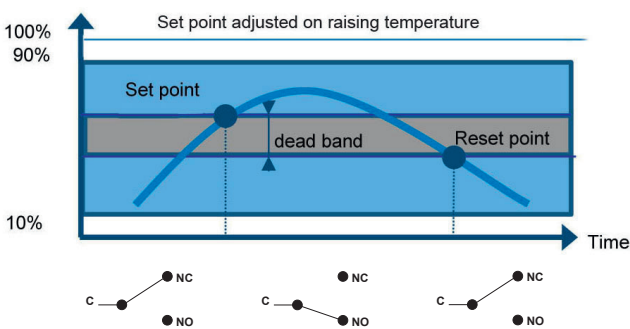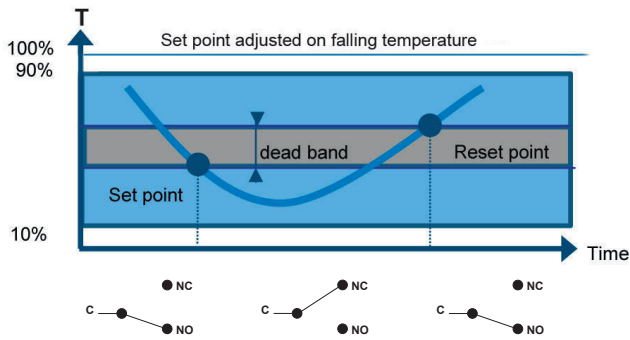

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

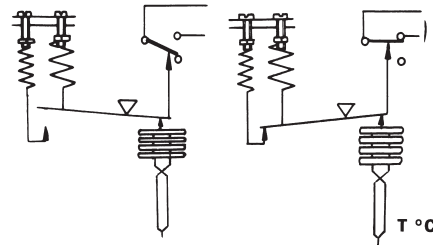

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling temperature


Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:


- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

1 SPDT



2 SPDT

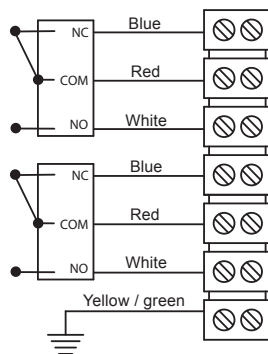

Micro switches characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	H	D (V)	J
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Manual reset	Ultra sensitive Hermetic	Manual reset
6 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
12 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	N/A	0.4 ... 4 A	N/A
24 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 4 A	0.1 ... 8 A
30 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	0.4 ... 1 A	0.1 ... 8 A	0.4 ... 2 A	0.1 ... 8 A
48 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	N/A	N/A	N/A	N/A
110 Vdc	0.1 ... 0.5 A	10 ... 50 mA	5 mA ... 1 A	N/A	N/A	N/A	N/A
220 Vdc	0.1 ... 0.25 A	10 ... 50 mA	5 mA ... 0.5 A	N/A	N/A	N/A	N/A
115 Vac	0.4 ... 10 A	10 ... 50 mA	50 mA ... 3 A	0.4 ... 10 A	0.1 ... 10 A	N/A	0.1 ... 10 A
250 Vac	0.2 ... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	0.1 ... 5 A	N/A	0.1 ... 5 A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	2000 V	1000 V	2000 V

Adjustable ranges



Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾								
			Adjustable dead band				Fixed dead band				
			A (B*)		M (K*)		C (W*)		E (F*)		H
10%		90%		10%		90%		10%	90%	10%	90%
°C											
-46 ... 0	40	400	4 - 9	2 - 9	8 - 12	4 - 12	1.5	0.8	5	2.5	
-20 ... 20	60	401	3 - 8	1.5 - 6	6 - 10	4 - 10	1	0.5	4	2	
0 ... 45	60	402	4 - 9	2 - 9	7 - 12	4 - 12	1.5	0.7	5	2.5	
40 ... 120	145	403	5 - 16	3 - 16	10 - 20	6 - 20	2	1.2	6	4	
100 ... 160	180	414	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3	
20 ... 80	100	415	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3	
160 ... 250	290	406	6 - 18	4 - 18	11 - 22	7 - 22	2.5	1.2	8	4.5	
70 ... 150	175	408	5 - 16	4 - 16	10 - 20	6 - 20	2	1	6	4	
130 ... 190	210	412	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3	
200 ... 270	290	413	5 - 12	3 - 12	9 - 15	5 - 15	2	1	6	3	

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

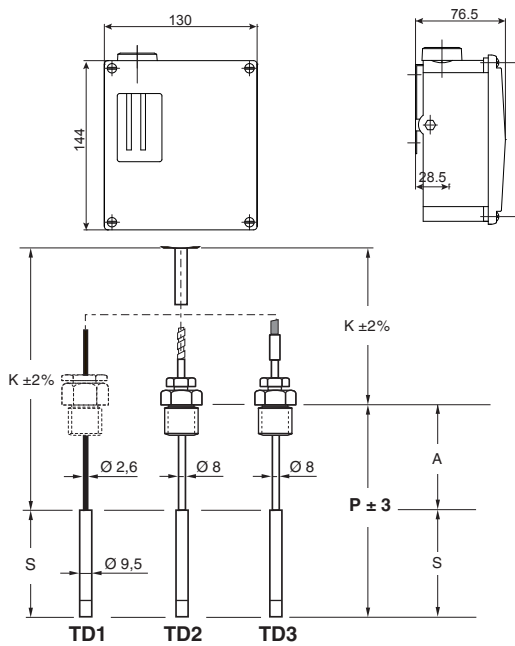


- S** = Bulb length (temperature sensitive part, see tables below)
- A** = Additional stem length
For versions TD2/3, $A_{min} = 25$ mm
For version TD1 there is no additional stem length ($A=0$).
The sliding connection is mounted on the capillary.
- P** = Immersion length ($P = S + A$)
- P_{min}** = Minimum immersion length ($P_{min} = S + A_{min}$)
- K** = Capillary length

Bulb length (S) according to the capillary length (K) and the temperature range (code)

Bulb Ø 14 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	80	80	80	80	80	80	80	80	80	80
K = 3 ... 7 m	S / mm	100	100	100	100	100	100	100	100	100	100
K = 8 ... 16 m	S / mm	150	150	150	150	150	150	150	150	150	150
K = 17 ... 20 m	S / mm	180	180	180	180	180	180	180	–	180	180

Bulb Ø 9.5 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	155	155	155	155	155	155	155	155	155	155
K = 3 ... 7 m	S / mm	200	200	200	200	200	200	200	200	200	200
K = 8 ... 16 m	S / mm	300	300	300	300	300	300	300	300	300	300
K = 17 ... 20 m	S / mm	370	370	370	370	370	370	370	–	370	370


Stainless steel sliding male connection (TD1)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	43	46
A	27/flat	27/flat
B	27/flat	27/flat

Waterproof after tightening mounted on the capillary.

Stainless steel sliding male connection (TD2/3)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	36	40
A	17/flat	17/flat
B	23/flat	23/flat


After tightening of the clamping nut, the stem is fixed in the process connection. Tight up to 40 bar.

Ordering details RTNA4 - RTAA4

	RT	-	A	.	4xx	.				/
Model	RT									
Industrial temperature switch										
Type of the bulb										
Stainless steel bulb and Copper alloy capillary			A							
Stainless steel bulb and capillary			N							
Approval										
Standard version without ATEX/IECEX approval			A							
Type of micro switches										
Deadband										
1 SPDT standard changeover switch			Adjustable		A					
2 SPDT standard changeover switch			Adjustable		B					
1 SPDT hermetically changeover switch			Adjustable		C					
2 SPDT hermetically changeover switch			Adjustable		W					
1 SPDT ultra sensitive changeover switch			Fix		E					
2 SPDT ultra sensitive changeover switch			Fix		F					
1 SPDT hermetically, ultra sensitive changeover switch			Fix		D					
2 SPDT hermetically, ultra sensitive changeover switch			Fix		V					
1 SPDT gold contact changeover switch			Adjustable		M					
2 SPDT gold contact changeover switch			Adjustable		K					
1 SPDT changeover switch, manual reset, opening on raising pressure			Fix		H					
1 SPDT changeover switch, manual reset, opening on falling pressure			Fix		J					
Temperature range (°C)										
-46 ... 0										400
-20 ... 20										401
0 ... 45										402
40 ... 120										403
100 ... 160										414
20 ... 80										415
160 ... 250										406
70 ... 150										408
130 ... 190										412
200 ... 270										413
Type of capillary										
TD1			Capillary without protection							1
TD2			Capillary with stainless steel protection							2
TD3			Capillary with stainless steel protection and PVC coating							3
Capillary length (K)										
1 meter										1
2 meters										2
3 meters										3
4 meters										4
5 meters										5
6 meters										6
7 meters										7
8 meters										8
9 meters										9
10 meters										A
11 meters										B
12 meters										C
13 meters										D
14 meters										E
15 meters										F
16 meters										G
17 meters										H
18 meters										J
19 meters										K
20 meters										L
Immersion length (P)										
Immersion length (P) = Bulb length (S) + additional stem length (A)										
P = S + 25 mm			(For S, see tables on page 4)							0
P = 150 mm			(not for TD1)							3
P = 160 mm			(not for TD1)							2
P = 250 mm			(not for TD1)							4
P = 400 mm			(not for TD1)							5
P = 600 mm			(not for TD1)							6
P = 1000 mm			(not for TD1)							D
Bulb diameter										
Ø 14 mm (standard)										E
Ø 9.5 mm										C
Process connection										
Without										0
G1/2										3
1/2 NPT										6
Options to be added behind the / (see example below)										/

Ordering example with options

RT	-	A	A	A	.	400	.	2	1	2	E	3	/	0407	_	9941
----	---	---	---	---	---	-----	---	---	---	---	---	---	---	------	---	------

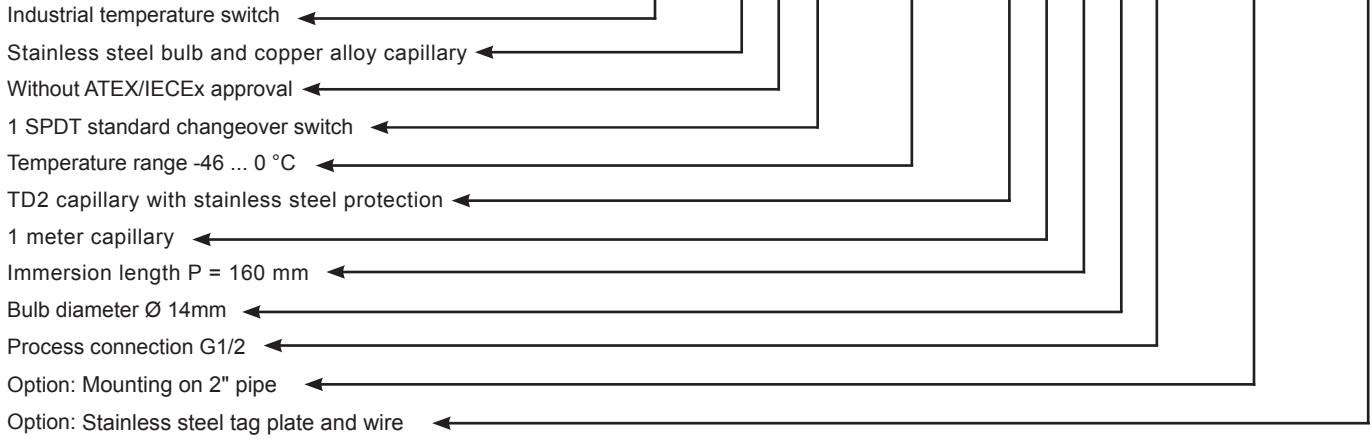



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Explosion proof Hazardous areas 1, 2, 21, 22

Applications

- Power generation safety equipment



Technical Data

Temperature range	-46 ... 0 °C to 40 ... 120 °C	Electrical function	See ordering code details on page 5
Temperature	Process: -46 ... +120 °C Ambient: -30 ... + 55 °C Storage: -40 ... + 55 °C	Adjustment	2 external adjustment screws on top of the case for set point and dead band
Repeatability	± 1% F.S. / constant temperature cycle	ATEX/IECEX	<u>Certificate</u> LCIE 03 ATEX 6231X (Type RA80) IECEX LCIE 15.0061X
CE conformity	Low Voltage Directive 2014/35/EU ATEX Directive 2014/34/EU		<u>Classification</u> CE Ex II 2 G D Ex d IIC T6 or T5 Gb Ex tb IIIC IIC T80 °C or T95 °C Db
Protection rating	IP 66 (EN 60529)		<u>T° ambient</u> -20 °C to +60 °C (T6 or T80 °C) or -20 °C to +70 °C (T5 or T95 °C)
Process connection	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L)		
Bulb	Stainless steel 1.4435/1.4404 (316L)		
Scale	Internal. Accuracy on reading ± 5% F.S.		
Housing	Type RA80, explosion proof, flameproof Aluminium epoxy painted. Captive stainless steel screws		
Mounting	3 back lugs for wall mounting		
Ground connection	Via internal terminal block		
Electrical connection	Terminal block with metallic cable gland for Ø 7 to 12 mm standard		


Options

Customer specific set point adjustment	Code SETP
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838

Principle

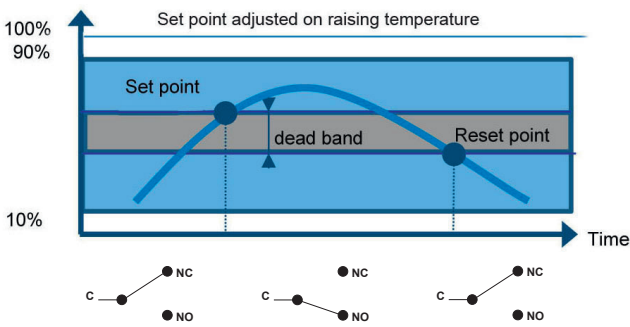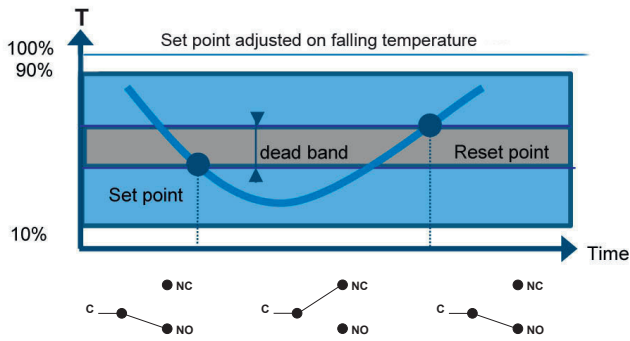

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

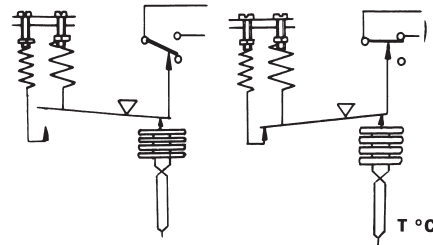

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment



Setpoint at 50% of the scale on falling temperature

Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:

- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

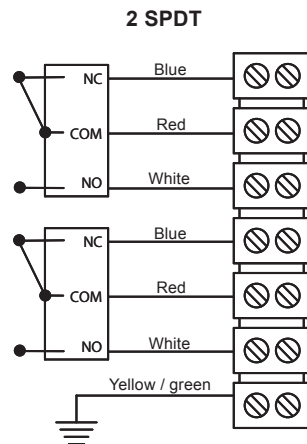

Hazardous areas: 1, 2, 21, 22

-20 °C ≤ Ta ≤ +70 °C	Dust IP6x	Gases
	T° surface	Class
Ta = 60 °C	80 °C	T6
Ta = 70 °C	95 °C	T5

Important : Maximum power dissipated inside enclosure does not exceed 5 W

All necessary measures must be taken by the user, to avoid the calorific transfer from the fluid to the apparatus head increasing the head's temperature to such that it reaches the self-ignition temperature of the gas in which it is used.

Micro switches characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	D (V)
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Ultra sensitive Hermetic
6 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
12 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
24 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
30 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	0.4 ... 1 A	0.4 ... 2 A
48 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	N/A	N/A
110 Vdc	0.1 ... 0.5 A	10 ... 50 mA	5 mA ... 1 A	N/A	N/A
220 Vdc	0.1 ... 0.25 A	10 ... 50 mA	5 mA ... 0.5 A	N/A	N/A
115 Vac	0.4 ... 10 A	10 ... 50 mA	50 mA ... 3 A	0.4 ... 10 A	N/A
250 Vac	0.2 ... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	N/A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	1000 V

Adjustable ranges




Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾									
			Adjustable dead band				Fixed dead band					
			A (B*)		M (K*)		C (W*)		E (F*)		D (V*)	
°C			10%	90%	10%	90%	10%	90%	10%	90%	10%	90%
°C												
-46 ... 0	40	300	6 - 13	3 - 13	12 - 18	6 - 18	2.25	1.2	7.5	3.7		
-20 ... 20	60	301	4.5 - 12	2.2 - 12	9 - 15	6 - 15	1.5	0.75	6	3		
0 ... 45	60	302	6 - 13	3 - 13	10 - 18	6 - 18	2.25	1.05	7.5	3.7		
40 ... 120	145	303	7.5 - 24	4.5 - 24	15 - 30	9 - 30	3	1.8	9	6		
20 ... 80	100	315	7.5 - 18	4.5 - 18	13 - 22	7.5 - 22	3	1.5	9	4.5		

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5


⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.


Dimensions (mm)

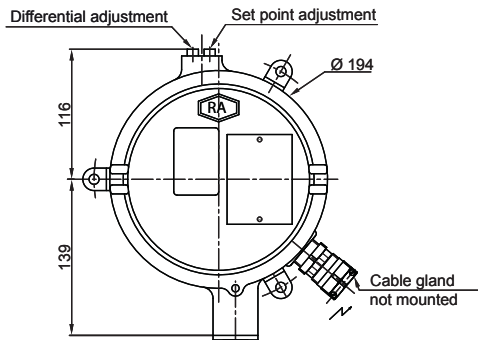

Weight of the housing: 4.4 kg

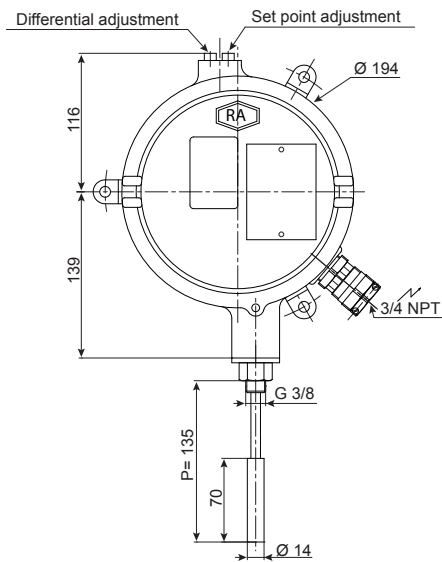

Thermowell
Thermowell for RTxx3
Stainless steel
Ordering code: 10271317



Ordering details RTNE3 - RTAE3

	RT	-	E	.	3xx	.	E	0	0	E	J	/
Model	RT	-										
Industrial temperature switch	RT	-										
Type of the bulb												
Stainless steel bulb + copper alloy connection			A									
Stainless steel bulb + connection			N									
Approvals												
ATEX/IECEX explosion proof				E								
Type of micro switches												
				Deadband								
1 SPDT standard changeover switch				Adjustable	A							
2 SPDT standard changeover switch				Adjustable	B							
1 SPDT hermetically changeover switch				Adjustable	C							
2 SPDT hermetically changeover switch				Adjustable	W							
1 SPDT ultra sensitive changeover switch				Fix	E							
2 SPDT ultra sensitive changeover switch				Fix	F							
1 SPDT hermetically, ultra sensitive changeover switch				Fix	D							
2 SPDT hermetically, ultra sensitive changeover switch				Fix	V							
1 SPDT gold contact changeover switch				Adjustable	M							
2 SPDT gold contact changeover switch				Adjustable	K							
Temperature range (°C)												
-46 ... 0					300							
-20 ... 20					301							
0 ... 45					302							
40 ... 120					303							
20 ... 80					315							
Type of design												
Direct mounting (TRD)										E		
Capillary length												
Without capillary										0		
Stem length P												
P=135 mm											0	
Bulb diameter												
Ø 14 mm												E
Process connection												
G3/8												J
Options to be added behind the / (see example below)												/

Ordering example with options

	RT	-	A	E	A	.	300	.	E	0	0	E	J	/	SETP	_	9941
Industrial temperature switch	RT	-															
Stainless steel bulb + Copper alloy connection			A														
With ATEX/IECEX explosion proof				E													
1 SPDT standard changeover switch					A												
Temperature range -46 ... 0 °C						.	300	.									
TRD direct mounting																	
Without capillary																	
Immersion length P=135 mm																	
Bulb diameter Ø 14mm																	
Process connection G3/8																	
Option: Customer specific set point adjustment															SETP	_	
Option: Stainless steel tag plate and wire																	9941

RTNE4 - RTAE4

Industrial temperature switch with capillary, explosion proof



BOURDON
The Original by Baumer



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Explosion proof Hazardous areas 1, 2, 21, 22

Applications

- Power generation safety equipment


Technical Data

Temperature range	-46 ... 0 °C to 200 ... 270 °C	Ground connection	Via internal terminal block
Temperature	Process: -46 ... +270 °C Ambient: -30 ... + 55 °C Storage: -40 ... + 55 °C	Electrical connection	Terminal block with metallic cable gland for Ø 7 to 12 mm standard
Repeatability	± 1% F.S. / constant temperature cycle	Electrical function	See ordering code details on page 5
CE conformity	Low Voltage Directive 2014/35/EU ATEX Directive 2014/34/EU	Adjustment	2 external adjustment screws on top of the case for set point and dead band
Protection rating	IP 66 (EN 60529)	ATEX/IECEX	<u>Certificate</u> LCIE 03 ATEX 6231X (Type RA80) IECEX LCIE 15.0061X
Process connection	Stainless steel 1.4404 (316L)		<u>Classification</u> C € Ex II 2 G D Ex d IIC T6 or T5 Gb Ex tb IIIC IIC T80 °C or T95 °C Db
Bulb	Stainless steel 1.4435/1.4404 (316L)		<u>T° ambient</u> -20 °C to +60 °C (T6 or T80 °C) or -20 °C to +70 °C (T5 or T95 °C)
Capillary	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L) For types of protection see ordering details on page 5		
Scale	Internal. Accuracy on reading ± 5% F.S.		
Housing	Type RA80, explosion proof, flameproof Aluminium epoxy painted. Captive stainless steel screws		
Mounting	3 back lugs for wall mounting		


Options

Customer specific set point adjustment	Code SETP
Mounting on 2" pipe	Code 0407
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838


Principle

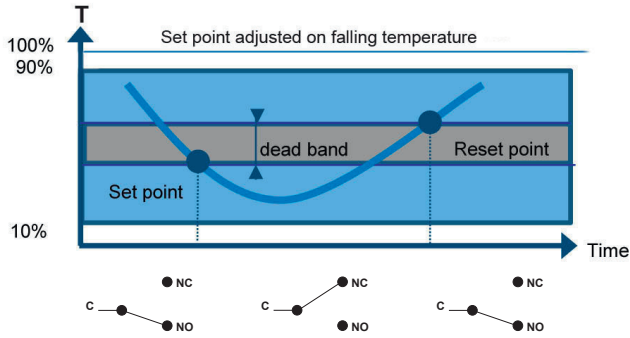

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

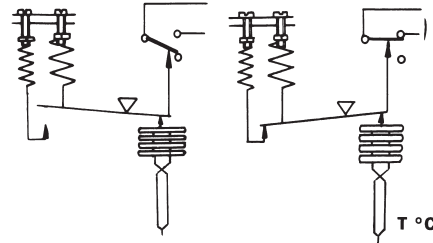

Set point and reset point must be between 10% and 90% of the selected scale.

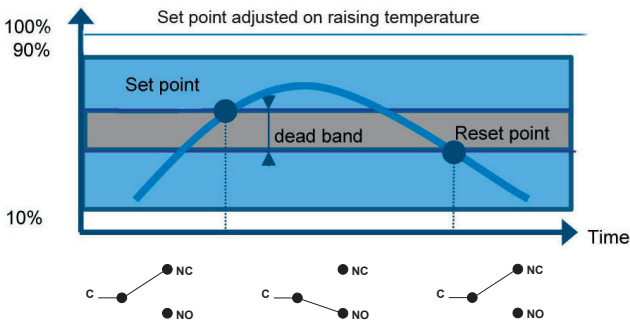

Standard factory adjustment


Setpoint at 50% of the scale on falling temperature

Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:

- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

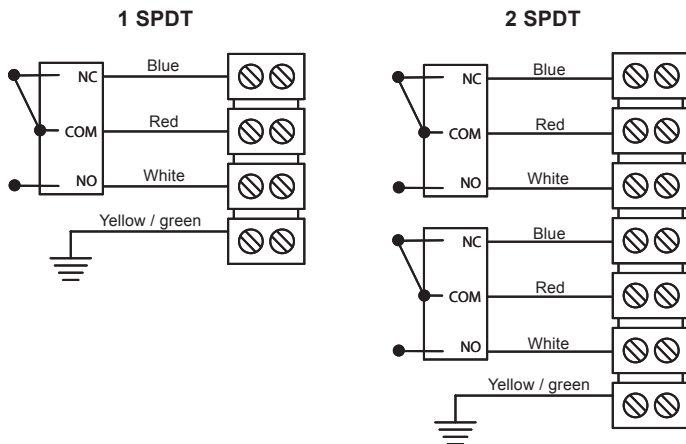

Hazardous areas: 1, 2, 21, 22

-20 °C ≤ Ta ≤ +70 °C	Dust IP6x	Gases
	T° surface	Class
Ta = 60 °C	80 °C	T6
Ta = 70 °C	95 °C	T5

Important : Maximum power dissipated inside enclosure does not exceed 5 W

All necessary measures must be taken by the user, to avoid the calorific transfer from the fluid to the apparatus head increasing the head's temperature to such that it reaches the self-ignition temperature of the gas in which it is used.

Micro switches characteristics

Switch code	A (B)	M (K)	C (W)	E (F)	D (V)
Type	Standard	Gold contact	Hermetic	Ultra sensitive	Ultra sensitive Hermetic
6 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
12 Vdc	0.4 ... 10 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
24 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 4 A	0.4 ... 1 A	0.4 ... 4 A
30 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	0.4 ... 1 A	0.4 ... 2 A
48 Vdc	0.4 ... 6 A	10 ... 50 mA	5 mA ... 3 A	N/A	N/A
110 Vdc	0.1 ... 0.5 A	10 ... 50 mA	5 mA ... 1 A	N/A	N/A
220 Vdc	0.1 ... 0.25 A	10 ... 50 mA	5 mA ... 0.5 A	N/A	N/A
115 Vac	0.4 ... 10 A	10 ... 50 mA	50 mA ... 3 A	0.4 ... 10 A	N/A
250 Vac	0.2 ... 10 A	N/A	50 mA ... 2.5 A	0.2 ... 10 A	N/A
Dielectric rigidity between contacts and ground	2000 V	2000 V	1500 V	2000 V	1000 V

Adjustable ranges


Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾									
			Adjustable dead band				Fixed dead band					
°C			A (B*)		M (K*)		C (W*)		E (F*)		D (V*)	
			10%	90%	10%	90%	10%	90%	10%	90%	10%	90%
°C												
-46 ... 0	40	400	6 - 13	3 - 13	12 - 18	6 - 18	2.25	1.2	7.5	3.7		
-20 ... 20	60	401	4.5 - 12	2.2 - 12	9 - 15	6 - 15	1.5	0.75	6	3		
0 ... 45	60	402	6 - 13	3 - 13	10 - 18	6 - 18	2.25	1.05	7.5	3.7		
40 ... 120	145	403	7.5 - 24	4.5 - 24	15 - 30	9 - 30	3	1.8	9	6		
100 ... 160	180	414	7.5 - 18	4.5 - 18	13 - 22	7.5 - 22	3	1.5	9	4.5		
20 ... 80	100	415	7.5 - 18	4.5 - 18	13 - 22	7.5 - 22	3	1.5	9	4.5		
160 ... 250	290	406	9 - 24	6 - 24	16 - 33	10 - 33	3.75	1.8	12	6.7		
70 ... 150	175	408	7.5 - 24	6 - 24	15 - 30	9 - 30	3	1.5	9	6		
130 ... 190	210	412	7.5 - 18	4.5 - 18	13 - 22	7.5 - 22	3	1.5	9	4.5		
200 ... 270	290	413	7.5 - 18	4.5 - 18	13 - 22	7.5 - 22	-	1.5	9	4.5		

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

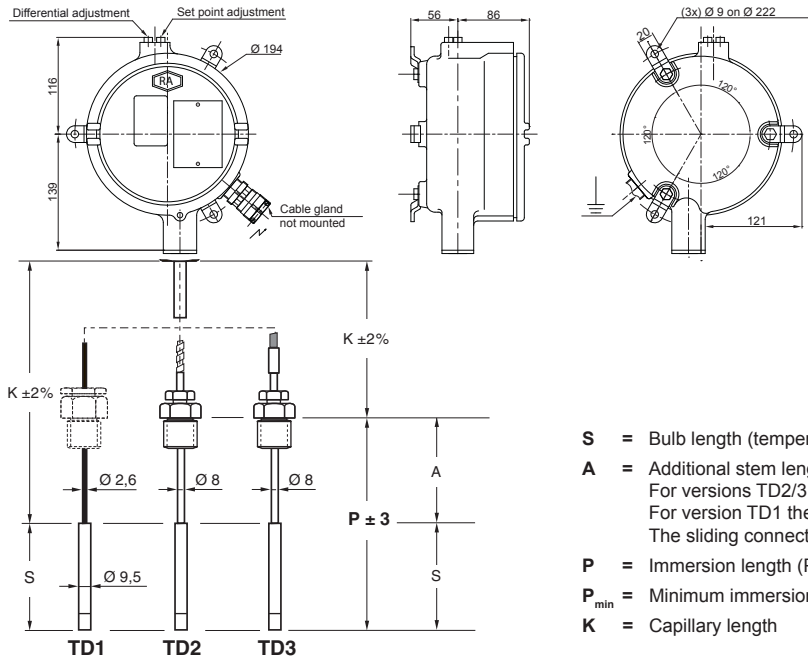


- S** = Bulb length (temperature sensitive part, see tables below)
- A** = Additional stem length
For versions TD2/3, $A_{min} = 25$ mm
For version TD1 there is no additional stem length ($A=0$).
The sliding connection is mounted on the capillary.
- P** = Immersion length ($P = S + A$)
- P_{min}** = Minimum immersion length ($P_{min} = S + A_{min}$)
- K** = Capillary length

Bulb length (S) according to the capillary length (K) and the temperature range (code)

Bulb Ø 14 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	80	80	80	80	80	80	80	80	80	80
K = 3 ... 7 m	S / mm	100	100	100	100	100	100	100	100	100	100
K = 8 ... 16 m	S / mm	150	150	150	150	150	150	150	150	150	150
K = 17 ... 20 m	S / mm	180	180	180	180	180	180	180	-	180	180

Bulb Ø 9.5 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	155	155	155	155	155	155	155	155	155	155
K = 3 ... 7 m	S / mm	200	200	200	200	200	200	200	200	200	200
K = 8 ... 16 m	S / mm	300	300	300	300	300	300	300	300	300	300
K = 17 ... 20 m	S / mm	370	370	370	370	370	370	370	-	370	370


Stainless steel sliding male connection (TD1)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	43	46
A	27/flat	27/flat
B	27/flat	27/flat

Waterproof after tightening mounted on the capillary.

Stainless steel sliding male connection (TD2/3)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	36	40
A	17/flat	17/flat
B	23/flat	23/flat


After tightening of the clamping nut, the stem is fixed in the process connection. Tight up to 40 bar.

Ordering details RTNE4 - RTAE4

	RT	-	E	.	4xx	.				/
Model	RT									
Industrial temperature switch		-								
Type of the bulb										
Stainless steel bulb and Copper alloy capillary			A							
Stainless steel bulb and capillary			N							
Approvals										
ATEX/IECEX explosion proof			E							
Type of micro switches										
		Deadband								
1 SPDT standard changeover switch		Adjustable	A							
2 SPDT standard changeover switch		Adjustable	B							
1 SPDT hermetically changeover switch		Adjustable	C							
2 SPDT hermetically changeover switch		Adjustable	W							
1 SPDT ultra sensitive changeover switch		Fix	E							
2 SPDT ultra sensitive changeover switch		Fix	F							
1 SPDT hermetically, ultra sensitive changeover switch		Fix	D							
2 SPDT hermetically, ultra sensitive changeover switch		Fix	V							
1 SPDT gold contact changeover switch		Adjustable	M							
2 SPDT gold contact changeover switch		Adjustable	K							
Temperature range (°C)										
-46 ... 0					400					
-20 ... 20					401					
0 ... 45					402					
40 ... 120					403					
100 ... 160					414					
20 ... 80					415					
160 ... 250					406					
70 ... 150					408					
130 ... 190					412					
200 ... 270					413					
Type of capillary										
TD1	Capillary without protection								1	
TD2	Capillary with stainless steel protection								2	
TD3	Capillary with stainless steel protection and PVC coating								3	
Capillary length (K)										
1 meter										1
2 meters										2
3 meters										3
4 meters										4
5 meters										5
6 meters										6
7 meters										7
8 meters										8
9 meters										9
10 meters										A
11 meters										B
12 meters										C
13 meters										D
14 meters										E
15 meters										F
16 meters										G
17 meters										H
18 meters										J
19 meters										K
20 meters										L
Immersion length (P)	Immersion length (P) = Bulb length (S) + additional stem length (A)									
P = S + 25 mm	(For S see tables on page 4)									0
P = 150 mm	(not for TD1)									3
P = 160 mm	(not for TD1)									2
P = 250 mm	(not for TD1)									4
P = 400 mm	(not for TD1)									5
P = 600 mm	(not for TD1)									6
P = 1000 mm	(not for TD1)									D
Bulb diameter										
Ø 14 mm (standard)										E
Ø 9.5 mm										C
Process connection										
Without										0
G1/2										3
1/2 NPT										6
Options to be added behind the / (see example below)										/

Ordering example with options

RT	-	A	E	A	.	400	.	2	2	2	E	3	/	SETP	_	9941
----	---	---	---	---	---	-----	---	---	---	---	---	---	---	------	---	------

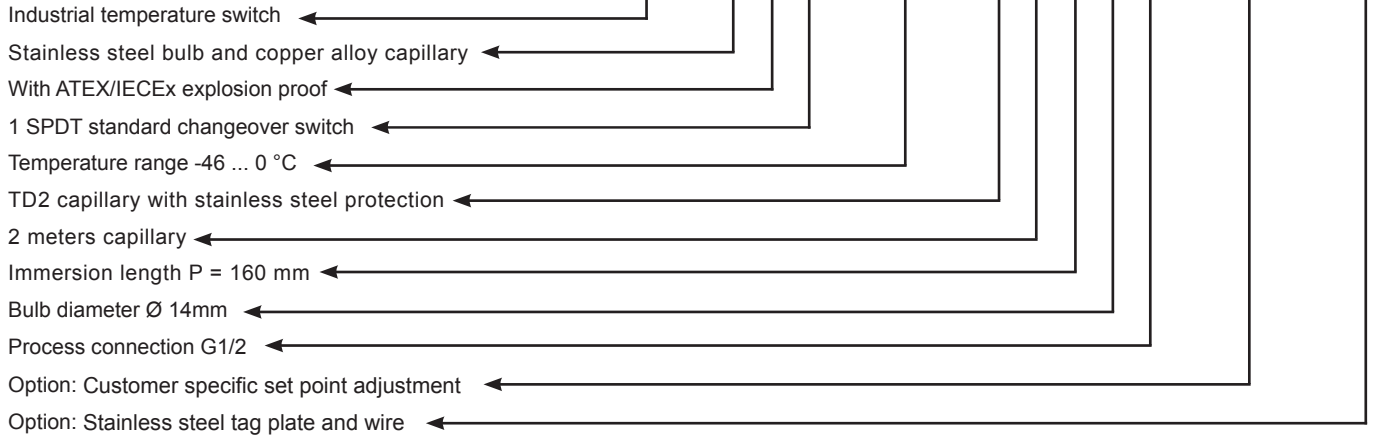



BOURDON
The Original by Baumer



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Intrinsic safety Hazardous area 0, 1, 2

Applications

- Power generation safety equipment

Technical Data


Temperature range	-46 ... 0 °C to 40 ... 120 °C
Temperature	Process: -46 ... +120 °C Ambient: -30 ... + 55 °C Storage: -40 ... + 55 °C
Repeatability	± 1% F.S. / constant temperature cycle
CE conformity	Low Voltage Directive 2014/35/EU ATEX Directive 2014/34/EU
Protection rating	IP 66 (EN 60529)
Process connection	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L)
Bulb	Stainless steel 1.4435/1.4404 (316L)
Scale	Internal. Accuracy on reading ± 5% F.S.
Cover	Zamak blue painted Captive stainless steel screws
Case	Black Zamak
Mounting	Direct mounting or with wall mounting bracket
Ground connection	Via internal terminal block
Electrical connection	Terminal block with plastic cable gland for Ø 7 to 10.5 mm

Electrical function	See ordering code details on page 5
Adjustment	2 external adjustment screws on top of the case for set point and dead band
ATEX/IECEx	<u>Certificate</u> LCIE 03 ATEX 6123X IECEx LCIE 15.0060X <u>Classification</u> CE Ex I M 1 Ex ia I Ma Ex II 1 G Ex ia IIC T6 or T5 Ga <u>Electrical data</u> U _{max} = 28 Vdc I _{max} = 120 mA P _{max} = 0.84 W C _i = Negligible ; L _i = Negligible


Options

Customer specific set point adjustment	Code SETP
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838
Electrical connection: stainless steel connector (Souriau)	Code 2298
Mobile plug for stainless steel connector (Souriau)	Code 2249

Principle

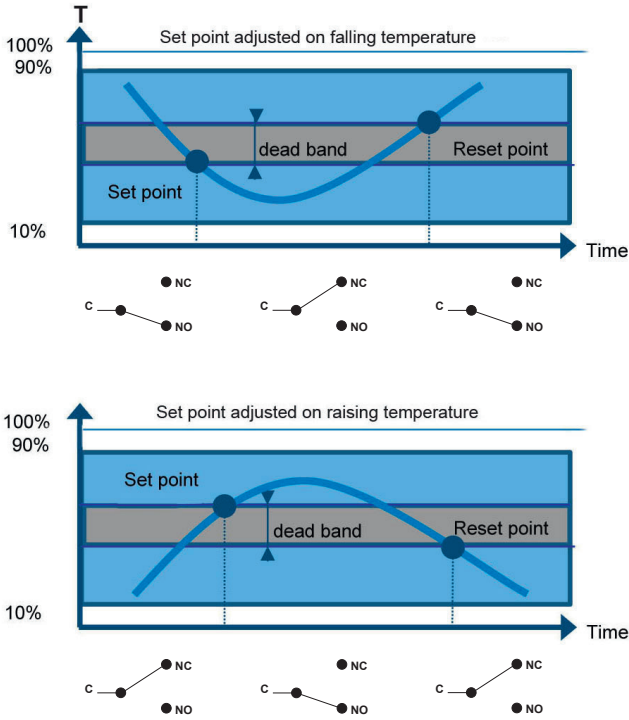

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

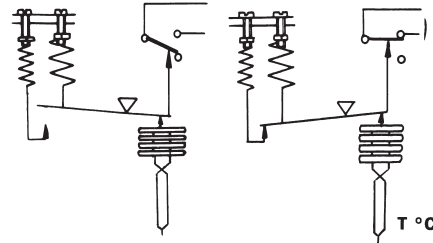

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling temperature


Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:


- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

1 SPDT




2 SPDT

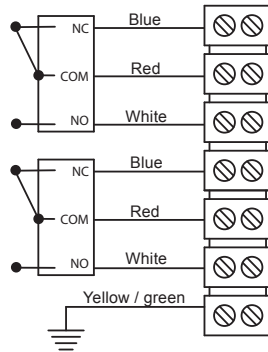

Hazardous area
Zone 0, 1, 2

Certified safety
barrier

Non hazardous
area

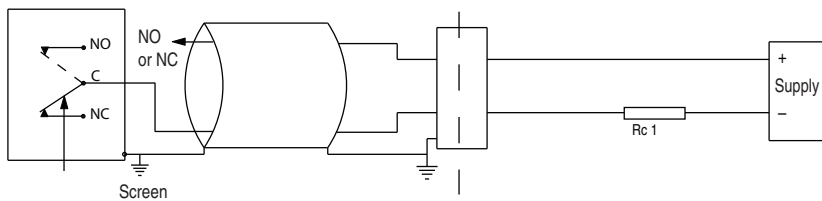

For max. ambient temperature refer to technical data on page 1.

The installation must be made in an intrinsically safe circuit whose certified electrical safety parameters do not exceed any of the values U_{max} , I_{max} and P_{max} given in the electrical data on page 1.

All necessary measures must be taken by the user, to avoid the calorific transfer from the fluid to the apparatus head increasing the head's temperature to such that it reaches the self-ignition temperature of the gas in which it is used.

Micro switches characteristics

Switch code	M (K)	C (W)	S
Type	Gold contact	Hermetic	Ultrasensitive Gold contact
6 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
12 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
24 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
30 Vdc	N/A	N/A	N/A
48 Vdc	N/A	N/A	N/A
110 Vdc	N/A	N/A	N/A
220 Vdc	N/A	N/A	N/A
115 Vac	N/A	N/A	N/A
250 Vac	N/A	N/A	N/A
Dielectric rigidity between contacts and ground	2000 V	1500 V	2000 V

Adjustable ranges





Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾					
			Adjustable dead band				Fixed dead band	
			M (K*)		C (W*)		S	
			10%	90%	10%	90%	10%	90%
°C	°C		°C					
-46 ... 0	40	300	4 - 9	2 - 9	8 - 12	4 - 12	3	2.5
-20 ... 20	60	301	3 - 8	1.5 - 8	6 - 12	4 - 12	2.5	1.5
0 ... 45	60	302	4 - 9	2 - 9	7 - 12	4 - 12	3	2
40 ... 120	145	303	5 - 16	3 - 16	10 - 20	6 - 20	4	3.5
20 ... 80	100	315	5 - 12	3 - 12	9 - 15	5 - 15	4	3

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5


⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

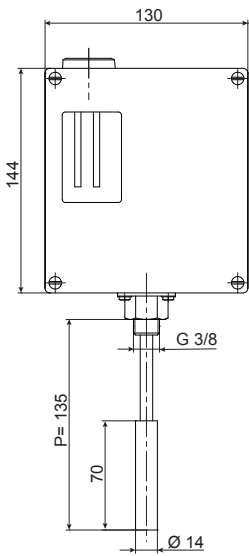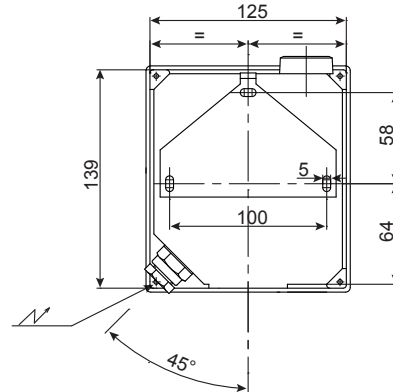

Thermowell
Thermowell for RTxx3
Stainless steel
Ordering code: 10271317




Ordering details RTNY3-RTAY3

	RT	-	Y	.	3xx	.	E	0	0	E	J	/
Model	RT	-										
Industrial temperature switch	RT	-										
Type of the bulb												
Stainless steel bulb + Copper alloy connection			A									
Stainless steel bulb + Connection			N									
Approval												
ATEX/IECEX intrinsic safety			Y									
Type of micro switches												
Deadband												
1 SPDT hermetically changeover switch										C		
2 SPDT hermetically changeover switch										W		
1 SPDT gold contact changeover switch										M		
2 SPDT gold contact changeover switch										K		
1 SPDT ultrasensitive gold contact changeover switch										S		
Temperature range (°C)												
-46 ... 0												300
-20 ... 20												301
0 ... 45												302
40 ... 120												303
20 ... 80												315
Type of design												
Direct mounting (TRD)												E
Capillary length												
Without capillary												0
Stem length P												
P=135 mm												0
Bulb diameter												
Ø 14 mm												E
Process connection												
G3/8												J

Options to be added behind the / (see example below) /

Ordering example with options

	RT	-	A	Y	C	.	300	.	E	0	0	E	J	/	SETP	_	9941
Industrial temperature switch	RT	-															
Stainless steel bulb + Copper alloy connection			A														
ATEX/IECEX intrinsic safety				Y													
1 SPDT standard changeover switch					C												
Temperature range -46 ... 0 °C						.	300	.									
TRD direct mounting																	
Without capillary																	
Immersion length P=135 mm																	
Bulb diameter Ø 14mm																	
Process connection G3/8																	
Option: Customer specific set point adjustment															SETP	_	
Option: Stainless steel tag plate and wire																	9941

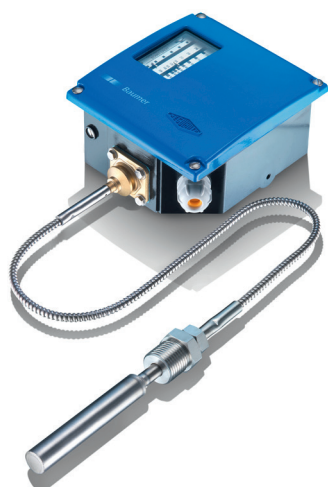

BOURDON
The Original by Baumer



Main Features

- Excellent repeatability
- Dead band adjustment for regulation
- Fix dead band for control and alarm
- Intrinsic safety Hazardous area 0, 1, 2

Applications

- Power generation safety equipment


Technical Data

Temperature range	-46 ... 0 °C to 200 ... 270 °C	Electrical connection	Terminal block with plastic cable gland for Ø 7 to 10.5 mm
Temperature	Process: -46 ... +270 °C Ambient: -30 ... + 55 °C Storage: -40 ... + 55 °C	Electrical function	See ordering code details on page 5
Repeatability	± 1% F.S. / constant temperature cycle	Adjustment	2 external adjustment screws on top of the case for set point and dead band
CE conformity	Low Voltage Directive 2014/35/EU ATEX Directive 2014/34/EU	ATEX/IECEX	<u>Certificate</u> LCIE 03 ATEX 6123X IECEX LCIE 15.0060X
Protection rating	IP 66 (EN 60529)		<u>Classification</u> C € Ex I M 1 Ex ia I Ma Ex II 1 G Ex ia IIC T6 or T5 Ga
Process connection	Stainless steel 1.4404 (316L)		<u>Electrical data</u> U _{max} = 28 Vdc I _{max} = 120 mA P _{max} = 0.84 W C _i = Negligible ; L _i = Negligible
Bulb	Stainless steel 1.4435/1.4404 (316L)		
Capillary	RTA: Copper alloy RTN: Stainless steel 1.4404 (316L) For types of protection see ordering details on page 5		
Scale	Internal. Accuracy on reading ± 5% F.S.		
Cover	Zamak blue painted Captive stainless steel screws		
Case	Black Zamak		
Mounting	Direct mounting or with wall mounting bracket		
Ground connection	Via internal terminal block		


Options

Customer specific set point adjustment	Code SETP
Mounting on 2" pipe	Code 0407
Stainless steel tag plate and wire	Code 9941
Lead seal of the adjustment screws	Code 8990
Nuclear cleanliness (RTN only)	Code 0838
Electrical connection: stainless steel connector (Souriau)	Code 2298
Mobile plug for stainless steel connector (Souriau)	Code 2249

Principle

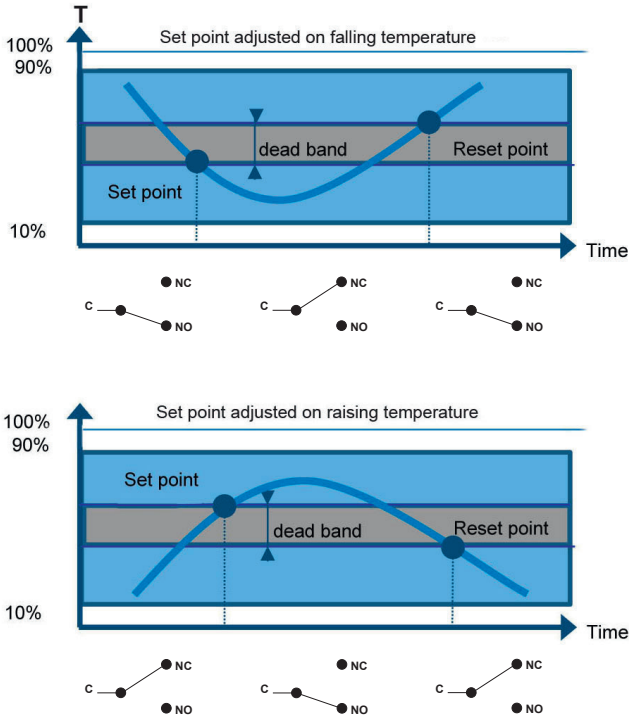

A vapour filled flexible sensing element actuates a microswitch by means of a lever. The set point is adjusted by means of a compressible spring installed in opposition.

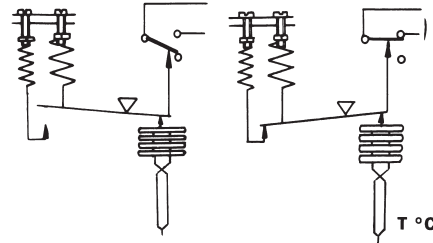

Set point and reset point must be between 10% and 90% of the selected scale.

Standard factory adjustment

Setpoint at 50% of the scale on falling temperature


Customer specific factory adjustment (option SETP)

The following specifications have to be given with the order:


- Setpoint value
- Adjustment on falling or raising temperature
- Dead band value (as needed) when using an adjustable dead band switch

Electrical connections

1 SPDT




2 SPDT

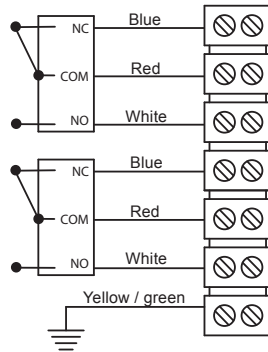

Hazardous area
Zone 0, 1, 2

Certified safety
barrier

Non hazardous
area

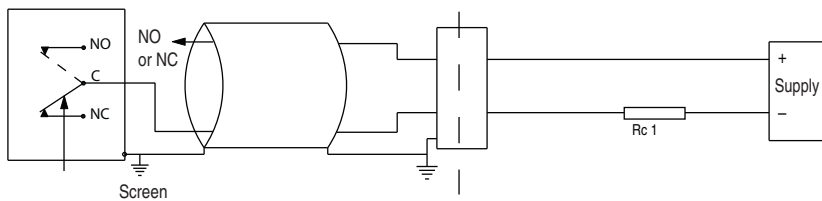

For max. ambient temperature refer to technical data on page 1.

The installation must be made in an intrinsically safe circuit whose certified electrical safety parameters do not exceed any of the values U_{max} , I_{max} and P_{max} given in the electrical data on page 1.

All necessary measures must be taken by the user, to avoid the calorific transfer from the fluid to the apparatus head increasing the head's temperature to such that it reaches the self-ignition temperature of the gas in which it is used.

Micro switches characteristics

Switch code	M (K)	C (W)	S
Type	Gold contact	Hermetic	Ultrasensitive Gold contact
6 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
12 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
24 Vdc	10 ... 50 mA	5 ... 120 mA	10 ... 50 mA
30 Vdc	N/A	N/A	N/A
48 Vdc	N/A	N/A	N/A
110 Vdc	N/A	N/A	N/A
220 Vdc	N/A	N/A	N/A
115 Vac	N/A	N/A	N/A
250 Vac	N/A	N/A	N/A
Dielectric rigidity between contacts and ground	2000 V	1500 V	2000 V

Adjustable ranges



Scale	T _{Max} accidental	Code	Micro-switch dead band ⁽¹⁾					
			Adjustable dead band				Fixed dead band	
			M (K*)		C (W*)		S	
			10%	90%	10%	90%	10%	90%
°C		°C						
-46 ... 0	40	400	4 - 9	2 - 9	8 - 12	4 - 12	3	2,5
-20 ... 20	60	401	3 - 8	1,5 - 6	6 - 10	4 - 10	2,5	1,5
0 ... 45	60	402	4 - 9	2 - 9	7 - 12	4 - 12	3	2
40 ... 120	145	403	5 - 16	3 - 16	10 - 20	6 - 20	4	3,5
100 ... 160	180	414	5 - 12	3 - 12	9 - 15	5 - 15	4	3
20 ... 80	100	415	5 - 12	3 - 12	9 - 15	5 - 15	4	3
160 ... 250	290	406	6 - 18	4 - 18	11 - 22	7 - 22	5	3,5
70 ... 150	175	408	5 - 16	4 - 16	10 - 20	6 - 20	4	3
130 ... 190	210	412	5 - 12	3 - 12	9 - 15	5 - 15	4	3
200 ... 270	290	413	5 - 12	3 - 12	9 - 15	9 - 15	4	3

(*) For version with 2 microswitches lower values of the dead band must be multiplied x 1.5

⁽¹⁾ The value of the dead band is depending on the value of the set point.

This table contains the dead band values for set point adjustment at 10% and 90% of the selected scale. For adjustable dead band the lower value corresponds to the dead band spring totally released and the higher corresponds to the dead band spring fully tensed. For other set points the dead band value can be calculated by linear interpolation between the values at 10% and 90%.

Dimensions (mm)

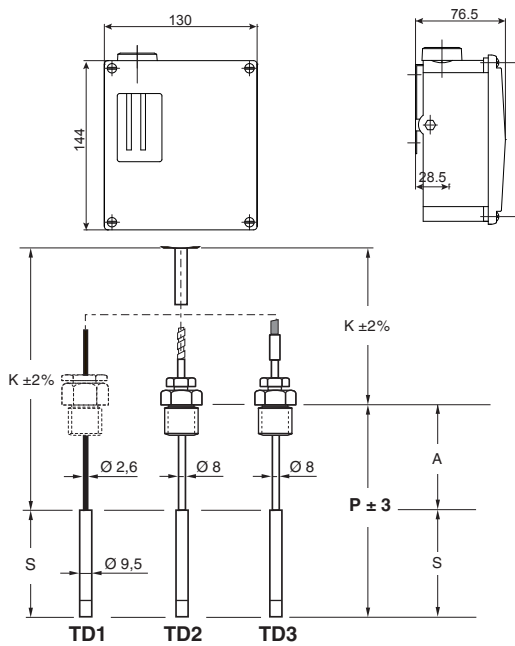


- S** = Bulb length (temperature sensitive part, see tables below)
- A** = Additional stem length
For versions TD2/3, $A_{min} = 25$ mm
For version TD1 there is no additional stem length ($A=0$).
The sliding connection is mounted on the capillary.
- P** = Immersion length ($P = S + A$)
- P_{min}** = Minimum immersion length ($P_{min} = S + A_{min}$)
- K** = Capillary length

Bulb length (S) according to the capillary length (K) and the temperature range (code)

Bulb Ø 14 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	80	80	80	80	80	80	80	80	80	80
K = 3 ... 7 m	S / mm	100	100	100	100	100	100	100	100	100	100
K = 8 ... 16 m	S / mm	150	150	150	150	150	150	150	150	150	150
K = 17 ... 20 m	S / mm	180	180	180	180	180	180	180	–	180	180

Bulb Ø 9.5 mm	Code	400	401	402	403	406	408	412	413	414	415
K = 0 ... 2 m	S / mm	155	155	155	155	155	155	155	155	155	155
K = 3 ... 7 m	S / mm	200	200	200	200	200	200	200	200	200	200
K = 8 ... 16 m	S / mm	300	300	300	300	300	300	300	300	300	300
K = 17 ... 20 m	S / mm	370	370	370	370	370	370	370	–	370	370


Stainless steel sliding male connection (TD1)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	43	46
A	27/flat	27/flat
B	27/flat	27/flat

Waterproof after tightening mounted on the capillary.

Stainless steel sliding male connection (TD2/3)



Thread and sizes		
F	G 1/2	1/2 NPT
H	18	21
L	36	40
A	17/flat	17/flat
B	23/flat	23/flat

After tightening of the clamping nut, the stem is fixed in the process connection. Tight up to 40 bar.

Ordering details RTNY4 - RTAY4

	RT	-	Y	.	4xx	.				/
Model	RT									
Industrial temperature switch										
Type of the bulb										
Stainless steel bulb and Copper alloy capillary			A							
Stainless steel bulb and capillary			N							
Approval										
ATEX/IECEX intrinsic safety			Y							
Type of micro switches										
Deadband										
1 SPDT hermetically changeover switch			Adjustable						C	
2 SPDT hermetically changeover switch			Adjustable						W	
1 SPDT gold contact changeover switch			Adjustable						M	
1 SPDT tropicalized changeover switch			Adjustable						K	
1 SPDT ultrasensitive gold contact changeover switch			Fix						S	
Temperature range (°C)										
-46 ... 0									400	
-20 ... 20									401	
0 ... 45									402	
40 ... 120									403	
100 ... 160									414	
20 ... 80									415	
160 ... 250									406	
70 ... 150									408	
130 ... 190									412	
200 ... 270									413	
Type of capillary										
TD1			Capillary without protection						1	
TD2			Capillary with stainless steel protection						2	
TD3			Capillary with stainless steel protection and PVC coating						3	
Capillary length (K)										
1 meter									1	
2 meters									2	
3 meters									3	
4 meters									4	
5 meters									5	
6 meters									6	
7 meters									7	
8 meters									8	
9 meters									9	
10 meters									A	
11 meters									B	
12 meters									C	
13 meters									D	
14 meters									E	
15 meters									F	
16 meters									G	
17 meters									H	
18 meters									J	
19 meters									K	
20 meters									L	
Immersion length (P)										
Immersion length (P) = Bulb length (S) + additional stem length (A)										
P = S + 25 mm			(For S, see tables on page 4)						0	
P = 150 mm			(not for TD1)						3	
P = 160 mm			(not for TD1)						2	
P = 250 mm			(not for TD1)						4	
P = 400 mm			(not for TD1)						5	
P = 600 mm			(not for TD1)						6	
P = 1000 mm			(not for TD1)						D	
Bulb diameter										
Ø 14 mm (standard)									E	
Ø 9.5 mm									C	
Process connection										
Without									0	
G1/2									3	
1/2 NPT									6	
Options to be added behind the / (see example below)										/

Ordering example with options

RT	-	A	Y	C	.	400	.	2	1	2	E	3	/	0407	-	9941
----	---	---	---	---	---	-----	---	---	---	---	---	---	---	------	---	------

