

Pressure Control Panels - Automatic Change Over System

VSP-5A Series

Product Features

- Pressure control panel with automatic change-over function
- VSR-1E Series single-stage regulator
- Brass chrome plated body for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- Stainless steel 316L body and bonnet for corrosive gases
- Modular design
- Diaphragm type shut-off valves
- Suitable for inlet pressure up to 300 bar
- Compact design for easy installation into safety cabinets
- Tested for use with oxygen




Typical Applications

- Component Testing
- Calibration Systems
- Laboratory Pressure Control
- High Pressure Sampling Systems
- Service & Test Equipment



Technical Data

Type:	Double stage
Inlet pressure P1:	max. 300 bar
Outlet pressure P2:	2/4/10/20/35/50 bar
Materials	
Body regulator:	see ordering info
Valve seat:	PCTFE
Diaphragm:	Hastelloy® C276
Filter:	SS 316L
Temperature range:	-30°C to +74°C
Leak rate (to atmosphere):	1x10 ⁻⁸ mbar l/s He (via seat): 1x10 ⁻⁶ mbar l/s He
Weight:	12.1kg

Schematic Drawing

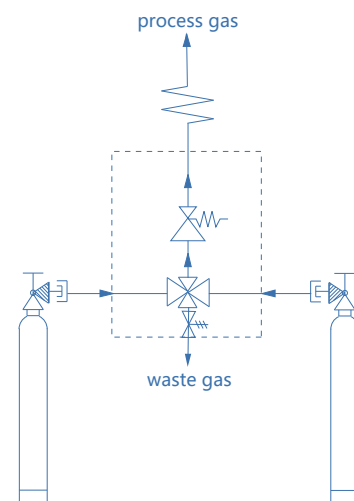



Flow Chart

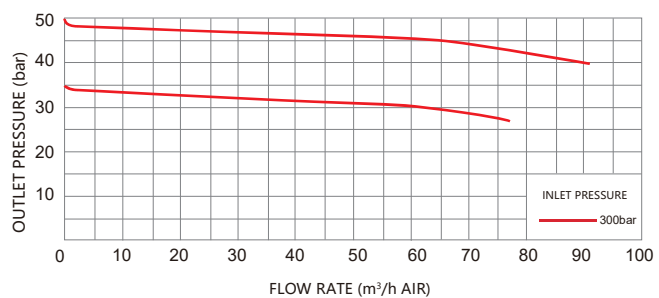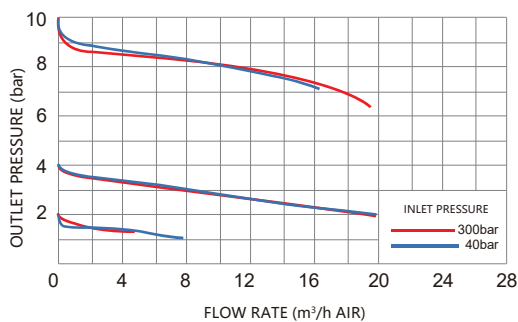

Pressure Control Panels - Automatic Change Over System

VSP-5A Series

Dimensions (mm)

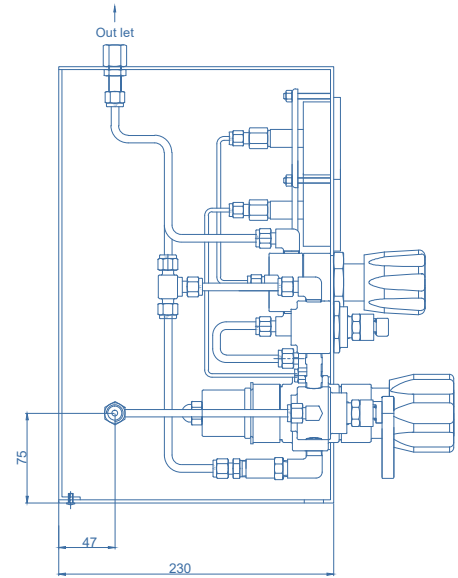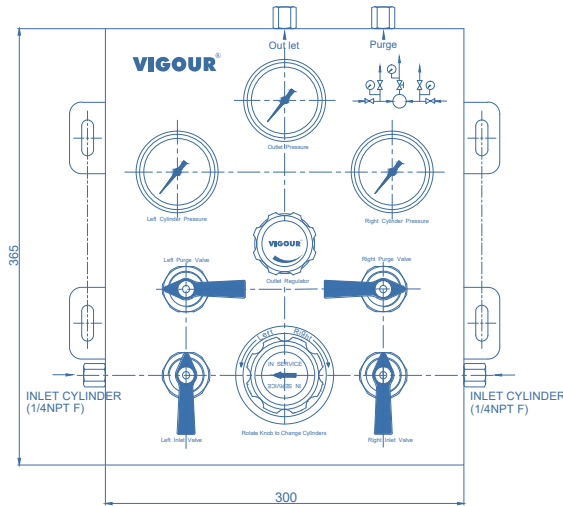

Ordering Information

VSP - 5AS - 200 - 10 - F4 - F4 - V - N2

Body Material

S: 316L

C: Chrome Plated Brass

Inlet Pressure P₁

40: 40 bar

100: 100 bar

200: 200 bar

300: 300 bar

Outlet Pressure P₂

2: to 2 bar

4: to 4 bar

10: to 10 bar

20: to 20 bar

35: to 35 bar (Non Relief valve)

50: to 50 bar (Non Relief valve)

Type Of Gas

Please specify type of gas

Option

None: Includes inlet valve and purge valve

V: Including inlet valve, not including purge valve

X: Non inlet valve and purge valve

Outlet Connection

F4: 1/4"NPT(F)

Inlet Connection

F4: 1/4"NPT(F) (standard)

M4: 1/4"NPT(M)